
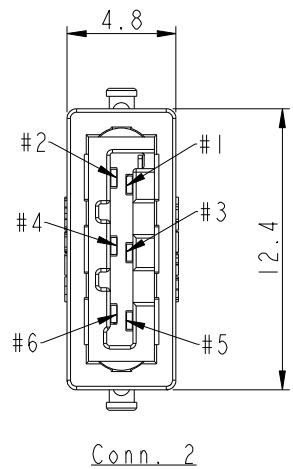
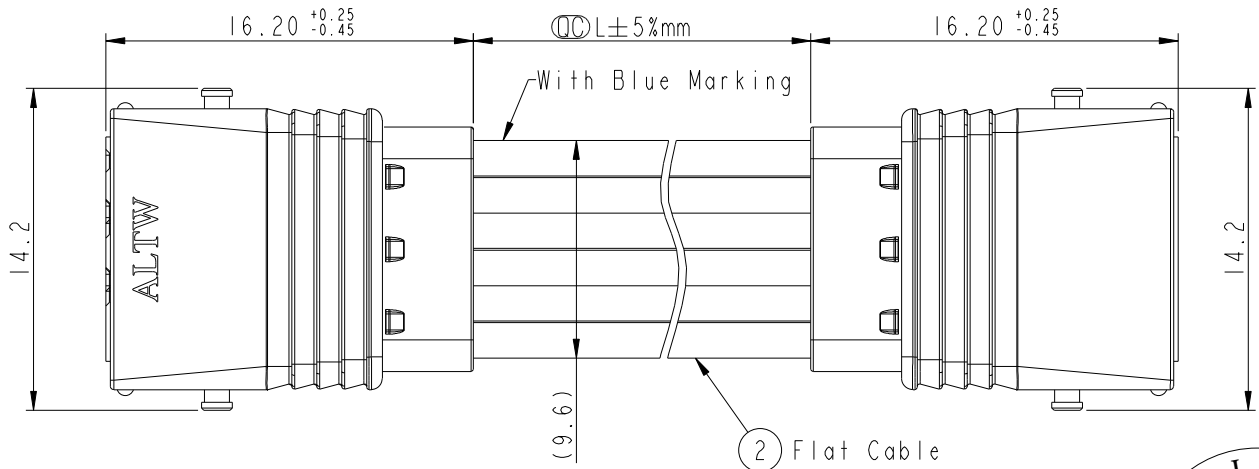
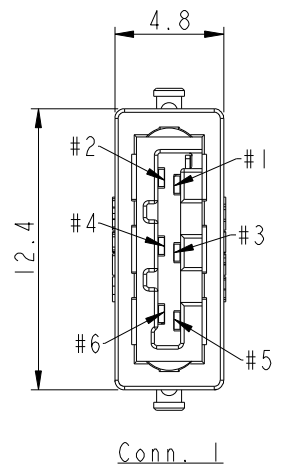


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014-05-29	Fisher	Initial Release

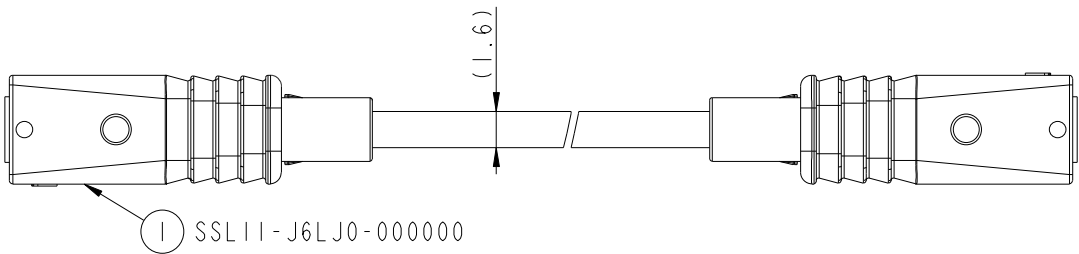


6	White	白	6
5	White	白	5
4	White	白	4
3	White	白	3
2	White	白	2
1	Blue	藍	1
Conn. 1	Wire Color	Conn. 2	
Pin Out			

SSL11-P6L2J-022DXX

06: L=600mm.  
Cable Length Range  
(L): 100~9900 mm

22: 22AWG

LOCK&LATCH OPTION  
0: W/O LOCK



- Notes:
- \*  $\varnothing$  Important Dimensions To Check.
  - \* Housing: Thermoplastic, UL94V-0, Natural White.
  - \* Terminal: Copper Alloy, Gold Plated.
  - \* Hood: Thermoplastic, UL94V-0, Natural White.
  - \* SR Mold: PP, UL94V-0, Natural White.
  - \* Flat Cable: UL21016, 6F \* 22AWG, XLPE Insulation, White

**UNIT:mm**

.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE SSL1.1 Flat Cable, 6-Pos. W/O Lock, Jack to Jack			
SCALE 3:1	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. A.3	$\varnothing$ : Inspection item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Fisher_Wang	DATE 2014-05-29
DWG NO SSL11-J6L2J-022DXX	CHECKED BY Ivan_Lin	DATE 2014-05-29
CUSTOMER ALTW	APPROVED BY Kevin_Hu	DATE 2014-05-29