




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE31350121~124	2013/05/14	Vicky	Modify Note & Wire Color.
C	LE31520139~142	2015/02/05	Vicky	Update Logo
D	LEN15A0274~277	2015/10/13	Vicky	Update Pin Out

ALTW
 CONFIDENTIAL
 2015-10-13
 R&D DEPT.

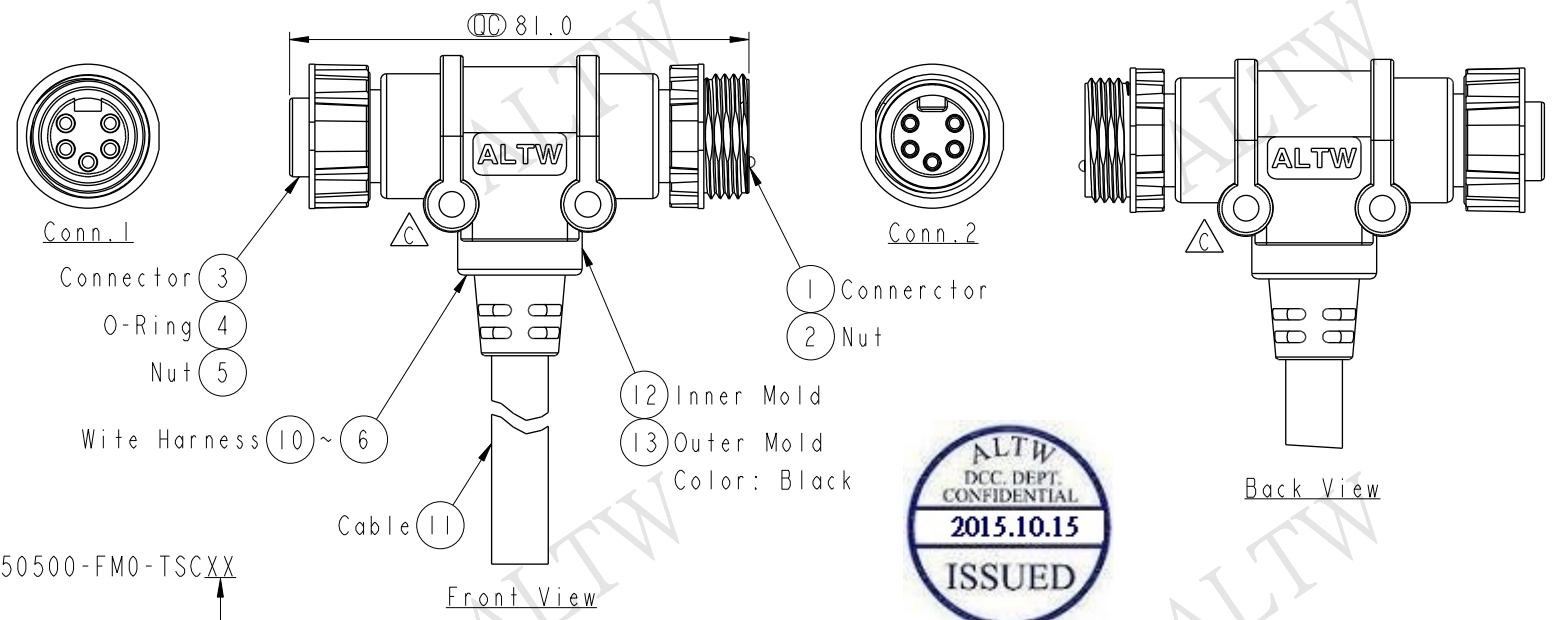

MN-050500-FM0-TSCXX
 XX: 01~99Meters
 01: 01Meters
 02: 02Meters
 ...
 99: 99Meters
 Cable Length(L): 01~99Meters

Blue (18AWG) 藍	5	5	Blue (18AWG) 藍
White (18AWG) 白	4	4	White (18AWG) 白
Black (16AWG) 黑	3	3	Black (16AWG) 黑
Red (16AWG) 紅	2	2	Red (16AWG) 紅
Green (18AWG) 綠	1	1	Drain (18AWG) 地線
Wire Color $\triangle B$	Conn.1	Conn.2	Cable $\triangle D$
Pin Out			

- Note:
- * CC Important Dimension
 - * Waterproof Rate: IP68
IP68: 1M Depth Of Water In 24hours
 - * Connector: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Wire Harness: UL1007
 - * Cable: UL20276 [(18#*IP+AL0+(16#*IP+AL)]+D+AL+B,
PVC Jacket, UV Resistant, Black, OD10.0mm
 - * Cable Length Tolerance: 01M: $\pm 40\text{mm}$
02M~05M: $\pm 60\text{mm}$
06M~10M: $\pm 100\text{mm}$
11M~30M: $\pm 200\text{mm}$
31M~99M: $\pm 500\text{mm}$

UNIT:mm mm
 TOLERANCE $\pm 0.5 \text{ mm}$

TITLE Mini T-Cable
 Screw FM Conn FM Pin To Cable
 SCALE 3:4 SIZE A4 SHEET 1 OF 1
 REV. D WC-REV. A.2 CC : Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
ALTW	Vicky Rita Lisa	2015-10-13 2015-10-13 2015-10-13