



REV. A	ECN NO.	DATE	SIGN	DESCRIPTION
	Initial Release	2009/04/15	Doreen	Change REV.02 to REV.A




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

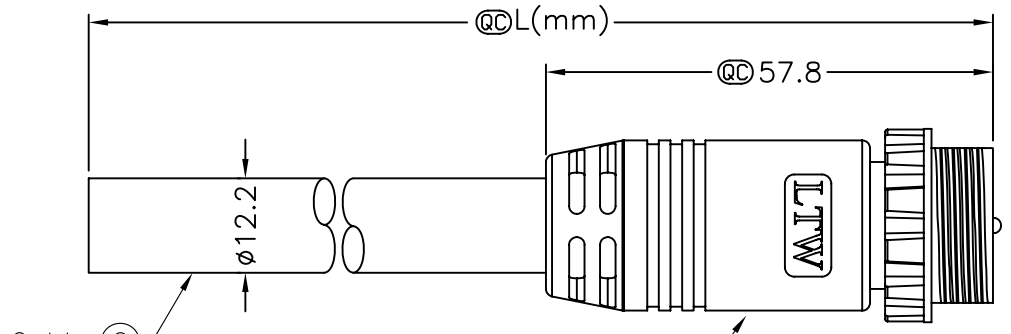

UMN-05AMMM-SL8000 ①  
Color: Black



Conn.

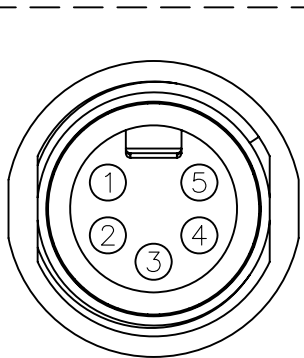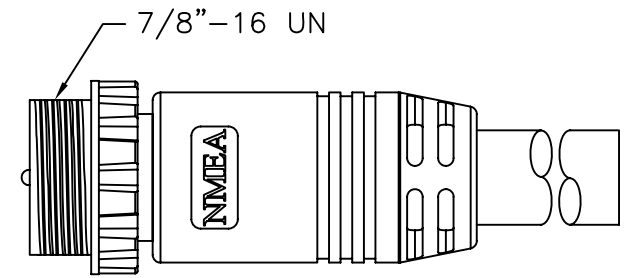

Pin Assignments  
Front View



Blue 藍	5
White 白	4
Black 黑	3
Red 紅	2
Drain	1
Wire Color	Conn
Pin Out	

UMN-05AFFM-SL8CXX

XX:01~99Meters  
01:01Meter  
02:02Meters  
:  
:  
99:99Meters

Cable Length(L):01~99Meters

Note:

- \* @C Important Dimension.
- \* Waterproof Rate: IP68
- \* Connector: Black, PU
- \* Nut: ZN-ZDC-3, Nickel Plated
- \* Male Pin: Copper Alloy, Gold Plated
- \* Cable: (18#+1P+AC)+(15#+1P+AC)  
+Drain+AL.Mylar+Braid OD=12.2mm
- \* Cable Length Tolerance: 01M:±40mm  
02M~05M:±60mm  
06M~10M:±100mm  
11M~30M:±200mm  
31M~99M:±500mm

UNIT:mm		TITLE	NMEA Mini M Conn M Pin For Cable		ITEM NO	DRAWN BY	DATE
TOLERANCE	±0.5 mm	SCALE	Free	SHEET 1 OF 1	DWG NO	CHECKED BY	DATE
		REV.	A	SIZE A4	UMN-05AMMM-SL8CXX	APPROVED BY	DATE
				@C :Inspection Item	CUSTOMER	Yitung	2009/04/27
					ALTW		

**Amphenol LTW**  
安費諾亮泰企業股份有限公司