




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-050347~350	2010/05/24	Omega	Change LTW Mark Direction.
C	LEN1160097~100	2011/05/26	Vicky	Modify SR View & Length.
D	LEN1460119~122	2014/06/11	Sam	Modify Logo.

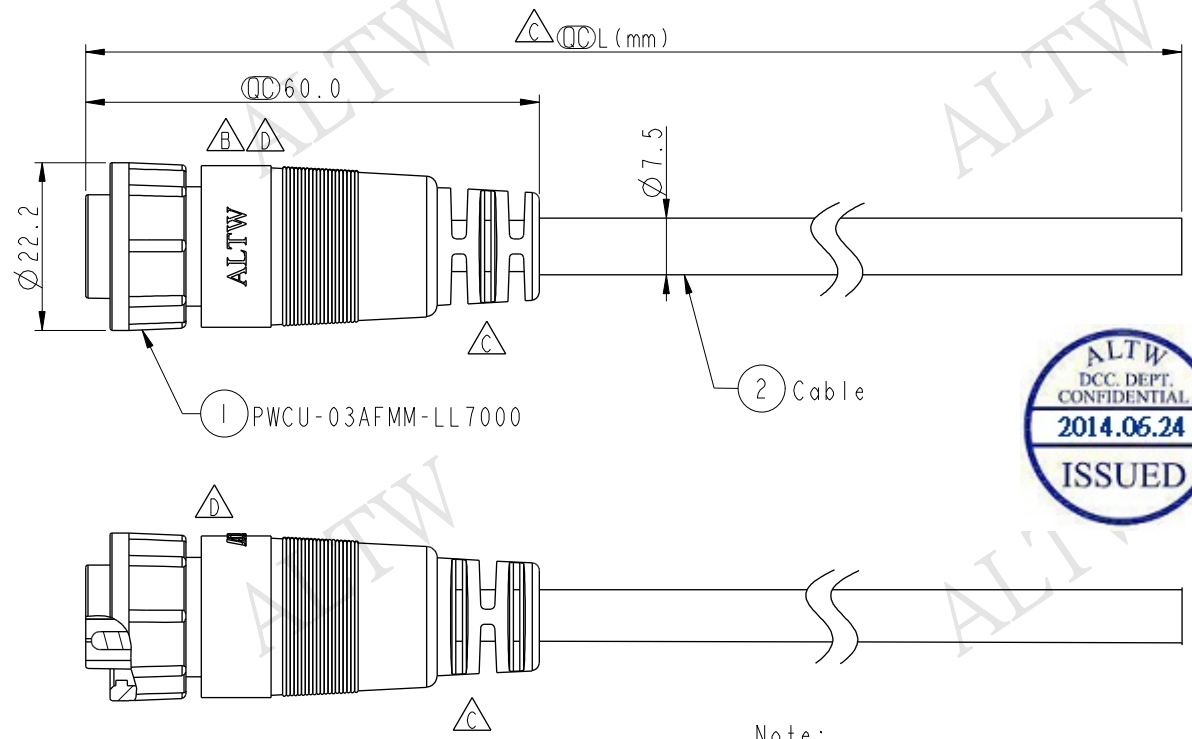

Conn.



Pin Assignments
Front View

Pin	Wire Color	Pin Out
4	Black 黑	
3	Blue 藍	
2	Brown 棕	
1	Drain 地線	
Conn.	Wire Color	Pin Out

PWCU-04AFMM-LL7AXX

XX: 01~99Meters
01: 01Meter
02: 02Meters
:
99: 99Meters

Note:

- * CC Important Dimension To Check.
- * Waterproof Rate: IP67.
- * Connector: Nylon+GF, Black.
- * Male Pin: Copper Alloy, Gold Plated.
- * Lock Nut: Nylon+GF, Black.
- * O-Ring: Silicone, Gray.
- * Cable: UL2464 16AWG*3C+Drain+Al/Mylar, PVC Jacket, UV Resistant, Black, OD7.5mm.
- * Cable Length Tolerance:
 - 01M: ±40mm
 - 02M~05M: ±60mm
 - 06M~10M: ±100mm
 - 11M~30M: ±200mm
 - 31M~99M: ±500mm

UNIT: mm	
TOLERANCE	
±0.5 mm	

TITLE Power, Cable Lock 4Pin F Conn. M Pin (2A+20A)			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. D	WC-REV. A.1	CC : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Sam	DATE 2014-06-11
DWG NO. PWCU-04AFMM-LL7AXX	CHECKED BY Vicky	DATE 2014-06-11
CUSTOMER ALTW	APPROVED BY Rita	DATE 2014-06-11