


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2020/08/21	Ruru	Old Item No. UA-20BFM-SB7AXX
B	C210802	2021/05/19	Ruru	△X1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

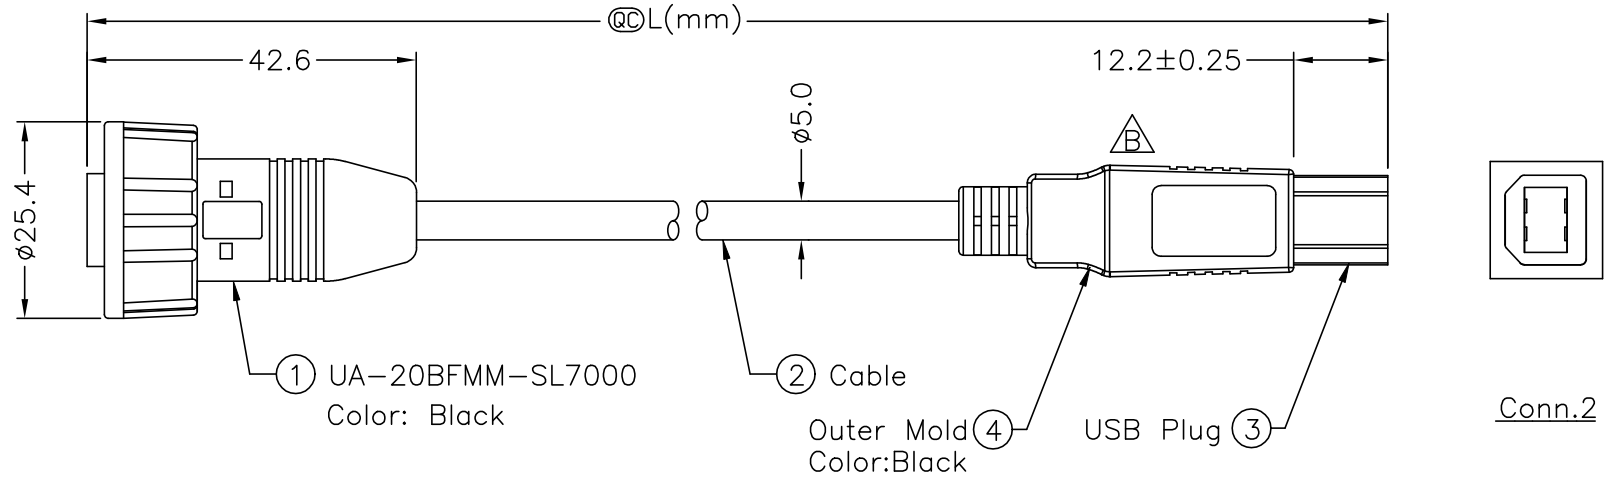

**Conn.1**  
Waterproof Rate: IP67

① UA-20BFMM-SL7000  
Color: Black

② Cable  
Outer Mold ④  
Color: Black

USB Plug ③

**Conn.2**

UA20FL-NBML-SAXXX



XXX:01~05Meters  
001:01Meter  
002:02Meters  
:  
:  
005:05Meters

Cable Length(L):01~05Meters

Twist

Note:

- \* @C Important Dimension.
- \* Housing: Thermoplastic, Black.
- \* USB A: Male Solder Type, Gold Plated.
- \* USB B: Male Solder Type, Gold Plated.
- \* Cable: USB2.0 28#\*1P+24#\*2C+Al.My+D+B, PVC Jacket, UV Resistant, Black, OD=5.0mm.
- \* Do Not Include On The Connector " "
- \* Cable Length Tolerance: 01M: ±40mm  
02M~05M: ±60mm



Shield	Drain 地線	Shield
4	Black 黑	4
3	Green 綠	3
2	White 白	2
1	Red 紅	1
Conn.1	Wire Color	Conn.2
Pin Out		

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE ACC, USB, A TYPE, DB-ENDED, FM		
SCALE Free	SHEET 1 OF 1	
REV. B	SIZE A4	@C : Inspection Item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru
DWG NO UA20FL-NBML-SAXXX	CHECKED BY Rita
CUSTOMER ALTW	APPROVED BY Max

DATE 2020/08/21
DATE 2020/08/21
DATE 2020/08/21