| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|---|---|---|---|---|
| A | Initial Release | 2020/08/21 | Ruru | Old Item No. UB-20BFM-SB7AXX |
| B | C210802 | 2021/05/19 | Ruru | △B X1 |
| | | | | |

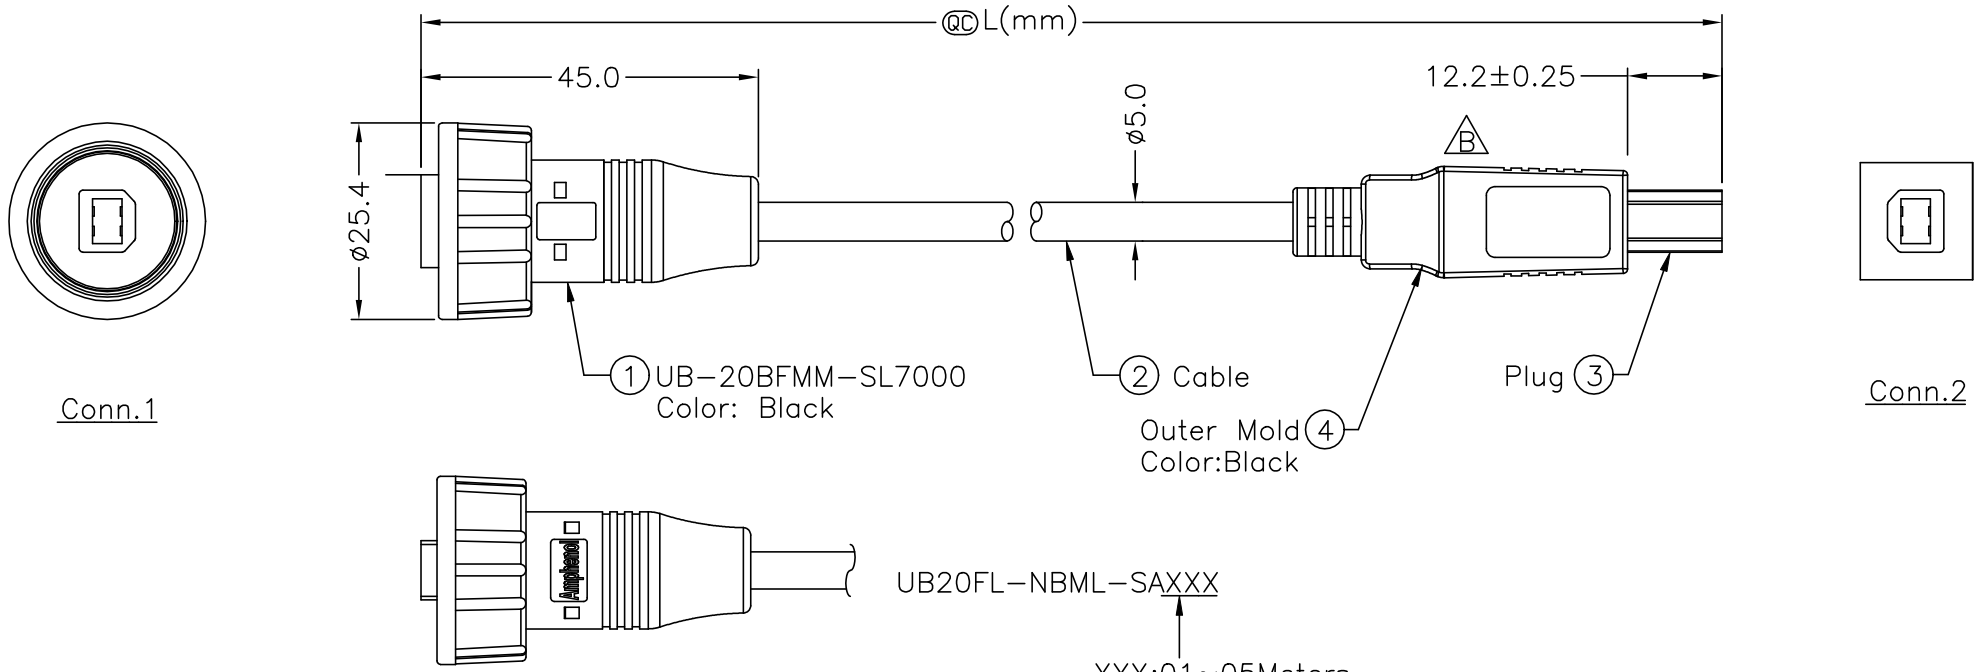


UB20FL-NBML-SAXXX

XXX:01~05Meters
001:01Meter
002:02Meters
:
:
005:05Meters
Cable Length(L):01~05Meters




Conn.1&2
Pin Assignments
Front View

| Shield | Drain 地線 | Shield |
|---|---|---|
| 4 | Black (24AWG) 黑 | 4 |
| 3 | Green (28AWG) 綠 | 3 |
| 2 | White (28AWG) 白 | 2 |
| 1 | Red (24AWG) 紅 | 1 |
| Conn.1 | Wire Color | Conn.2 |
| | Pin Out | |

Twist

Note:
* QC Important Dimension.
* Housing: Thermoplastic, Black.
* USB B: Male Solder Type, Gold Plated.
* USB B: Male Solder Type, Gold Plated.
* Cable:USB2.0 28#*1P+24#*2C+Al.My+D+B, PVC Jacket,UV Resistant,Black,OD=5.0mm.
* Do Not Include On The Connector" "
* Cable Length Tolerance:01M:±40mm
02M~05M:±60mm

| | | | | |
|---|---|---|---|---|
| UNIT:mm | TITLE: ACC, USB, B TYPE, DB-ENDED, FM | Amphenol LTW 安費諾亮泰企業股份有限公司 | ITEM NO | DRAWN BY: Ruru / DATE: 2020/08/21 |
| TOLERANCE: ±0.5 mm | SCALE: Free / SHEET: 1 OF 1 | | DWG NO: UB20FL-NBML-SAXXX | CHECKED BY: Rita / DATE: 2020/08/21 |
| | REV.: B / SIZE: A4 / QC :Inspection Item | | CUSTOMER: ALTW | APPROVED BY: Max / DATE: 2020/08/21 |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.