


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Released	2018/08/30	Eagle	Initial Released
B	C210496	2021/03/29	Ruru	△X4

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

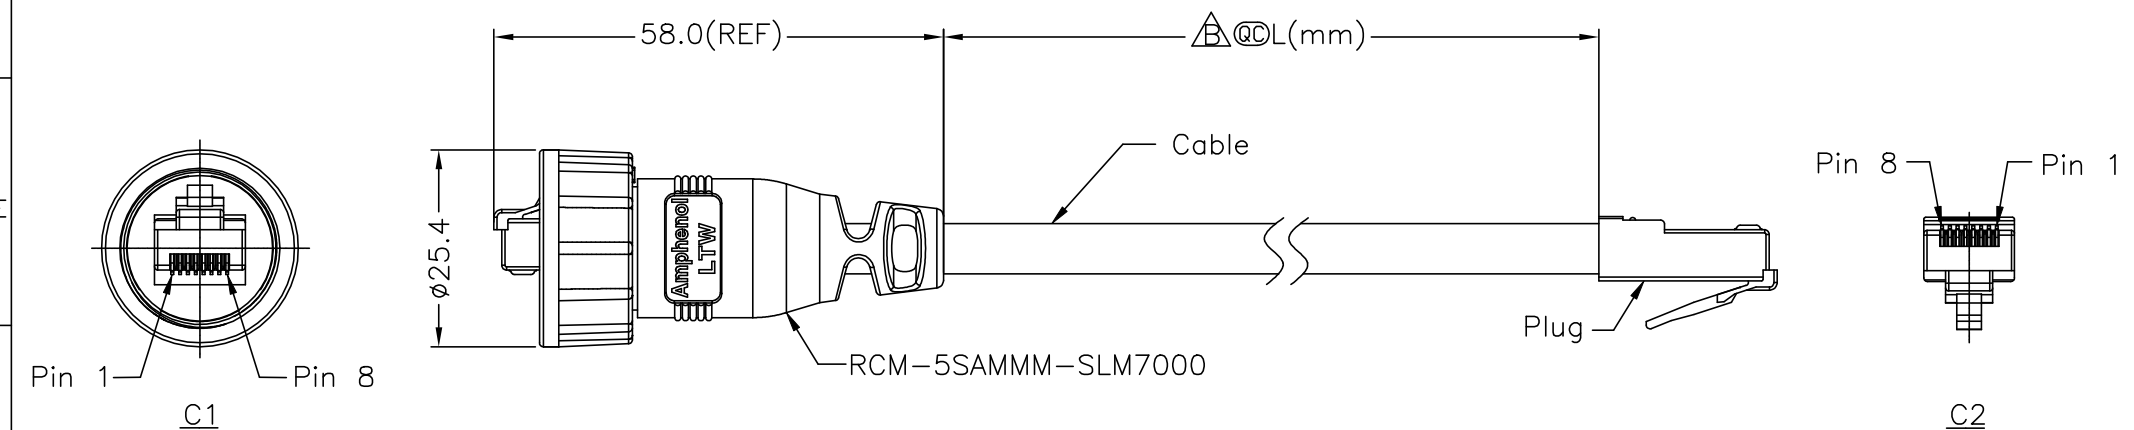

△RCM5SM-SPG06M-SL7BXX
 XX:01~99Meters
 01:01Meter
 02:02Meters
 :
 99:99Meters

Shield	Drain Wire	地線	Shield	
8	Brown	棕	8	Twist
7	White/Brown	白/棕	7	
6	Green	綠	6	Twist
5	White/Blue	白/藍	5	
4	Blue	藍	4	
3	White/Green	白/綠	3	Twist
2	Orange	橙	2	
1	White/Orange	白/橙	1	Twist
C1	Wire Color		C2	

Pin Out

Notes:
 * @Q Important Dimension.
 C1
 * Waterproof Rate: IP67
 * Housing: Thermoplastic, Black
 * Screw Nut: Matel, Nickel Plated.
 △* Gasket: Rubber, Gray.
 C2:
 * 8P8C, Shielded PLUG.
 * Cable: CAT.5e FTP 24#*4P+My+D+Al/My, PVC Jacket, UV resistant, OD=6.5mm, Black.
 △* Cable length tolerance: 1M: +60/-0 mm
 1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 99M: ±500 mm

UNIT:mm TOLERANCE ±0.5 mm	 TITLE RJ, C METAL, C5E SHIELED, M SH PLUG, PLUG 6U"AU, M	 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY	DATE
			DWG NO RCM5SM-SPG06M-SL7BXX	Eagle	2018/08/30
SCALE Free	SHEET 1 OF 1		CUSTOMER ALTW	CHECKED BY	DATE
REV. B	SIZE A4	@Q :Inspection Item		Brady	2018/08/30
				APPROVED BY	DATE
				Max	2018/08/30