


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1450006	2014-04-26	Tom_gu	Change D Cut
C	LEN1810088	2017-11-29	Jalam	Change The Tolerance
D	EI91612	2019-09-16	Ruru	Drawing Code Unified Writing

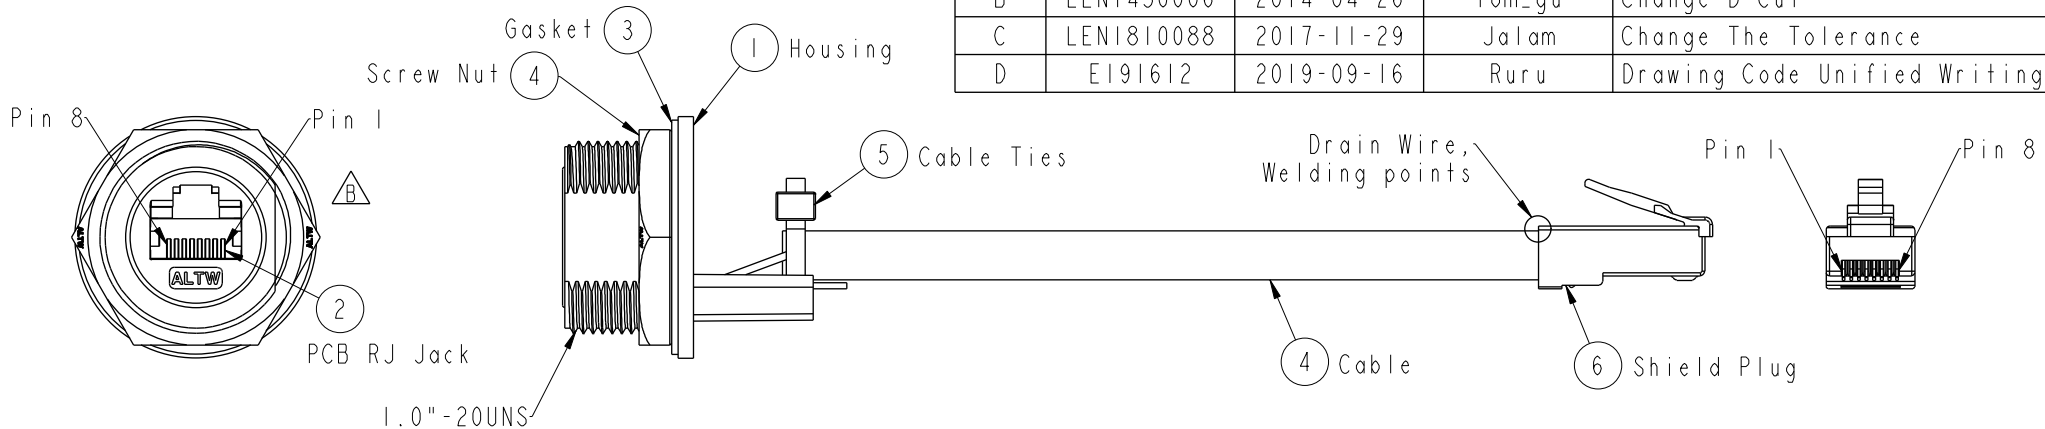

RDP-5SPFFP-SCU7BXX $\triangle D$


10: 100mm
15: 150mm
20: 200mm

A0: 1000mm
Cable Pitch Unit=50mm
Cable Length(L): 100~1000mm

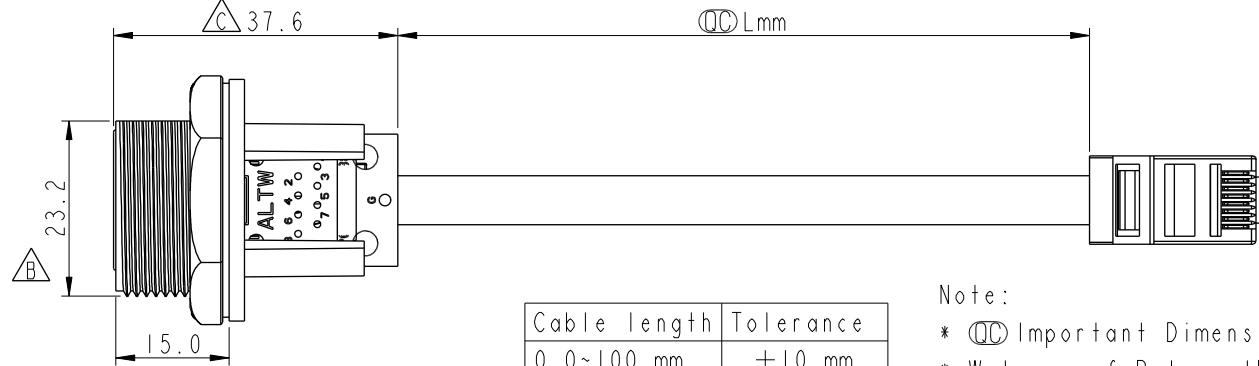

Cable length	Tolerance
0.0~100 mm	±10 mm
101~300 mm	±15 mm
301~1000 mm	±20 mm

- Note:
- * Ⓢ Important Dimension
 - * Waterproof Rate : IP67, UNMATED WATERPROOF
 - * Housing : Nylon+GF, BLACK
 - * Screw Nut : Nylon+GF, BLACK
 - * Gasket : Silicone, UL 94V-0, Gray.
 - * PCB: FR-4
 - * Cable: CAT5E FTP 24#*4P+D+AL/MY, 6.5
 - * Jack : PBT Polyester UL 94V-0
 - * Use with waterproof cap or dust cap for Panel Thickness Max: 2.4mm
 - * Use without waterproof cap or dust cap for Panel Thickness Max: 3.6mm
 - * Screw torsion value range: 8~15kgf-cm



Shield	Drain Wire	接地線	Shield	
8	Brown	棕	8	Twist
7	White/Brown	白/棕	7	
6	Green	綠	6	Twist
5	White/Blue	白/藍	5	
4	Blue	藍	4	Twist
3	White/Green	白/綠	3	
2	Orange	橘	2	Twist
1	White/Orange	白/橘	1	
Jack	Wire Color	Pin Out	Plug	

UNIT: mm

TOLERANCE

.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE: RJ45, D SIZE, UNMATED WATERPROOF

SCALE: 1:1

SIZE: A4

SHEET: 1 OF 1

REV: D

WC-REV: A.4

Ⓢ : Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2019-09-16
DWG NO	CHECKED BY	DATE
RDP-5SPFFP-SCU7BXX	Rita	2019-09-16
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2019-09-16