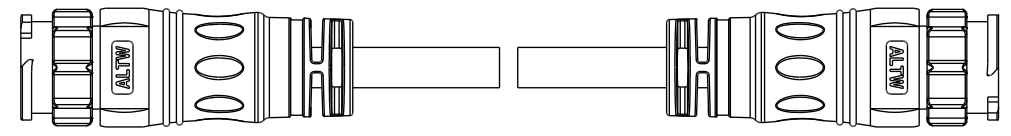
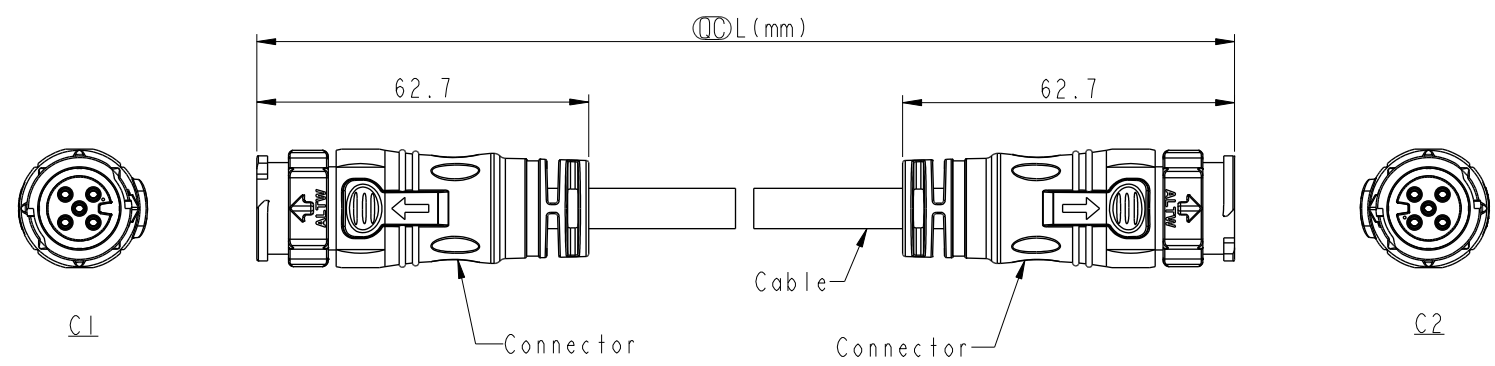


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/06	Ruru	Initial Released



- Note:
- \*  $\varnothing$  Important Dimension.
  - \* Waterproof Rate: IP68, Mated.  
IP68: 1M depth of water in 24 hours.
  - \* Connector: Thermoplastic, Black.
  - \* Pin: Copper Alloy, Gold Plated.
  - \* Cable: UL21388, PVC Jacket, Black.
  - \* Cable Length Tolerance: 0.5M: +60/-0mm  
01M: +60/-0mm  
02~03M: +120/-0mm  
04~05M: +160/-0mm  
06~10M: ±100mm  
11~20M: ±200mm  
21~30M: ±300mm  
31~99M: ±500mm

UNIT: mm		TITLE ACC, XLOK, C-10A, DB-ENDED MM
TOLERANCE ±0.5 mm	SCALE 1:2	SIZE A4
REV. A	WC-REV.	SHEET 1 OF 2
$\varnothing$ : Inspection item		

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Ruru	DATE 2020-01-06
DWG NO. AB-CBXXHL-CBHL-QDXXX	CHECKED BY Rita	DATE 2020-01-06
CUSTOMER ALTW	APPROVED BY Max	DATE 2020-01-06



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.


5P	PVC	7.6	16	AB-CB05HL-CBHL-QDXXX
4P		6.8		AB-CB04HL-CBHL-QDXXX
Contacts	Cable Jacket	Cable OD	AWG	Item No.

AB - CB XX H L - CB H L - Q D XXX

04: 4Pin  
05: 5Pin

XXX: 0.5~99Meters  
A05: 0.5 Meter  
001: 01 Meter  
002: 02 Meters  
:  
099: 99 Meters

Pin Out	4	Orange	橙	5	Yellow	黃
	3	Red	紅	4	Orange	橙
	2	Brown	棕	3	Red	紅
	1	Black	黑	2	Brown	棕
				1	Black	黑
	Pin #	Wire		Pin #	Wire	
C1 & C2						
	4P			5P		
Pin Assignments Front View						

UNIT:mm	
TOLERANCE	± 0.5 mm

TITLE ACC, XLOK, C-10A, DB-ENDED MM		
SCALE 1:2	SIZE A4	SHEET 2 OF 2
REV. A	WC-REV.	QC: Inspection item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2020-01-06
DWG NO AB-CBXXHL-CBHL-QDXXX	CHECKED BY Rita	DATE 2020-01-06
CUSTOMER ALTW	APPROVED BY Max	DATE 2020-01-06