
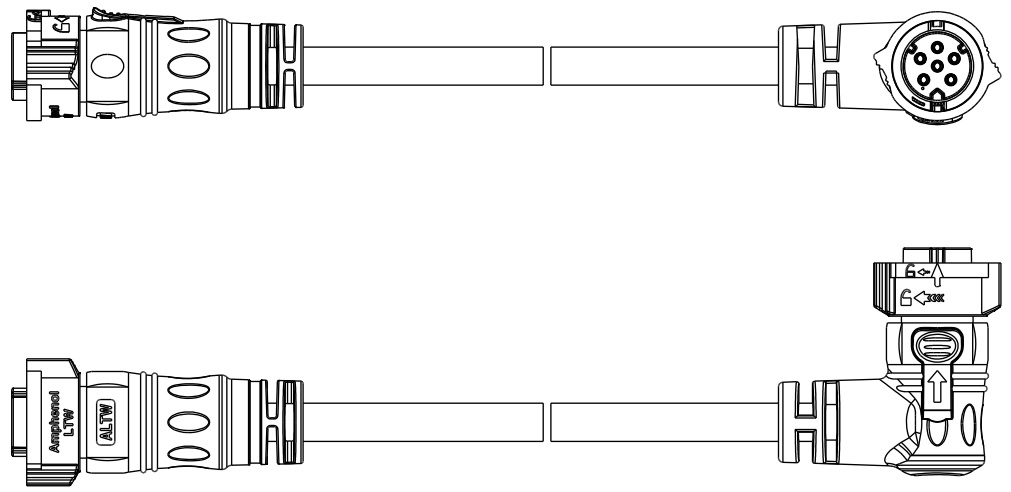


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/02	Ruru	Initial Released

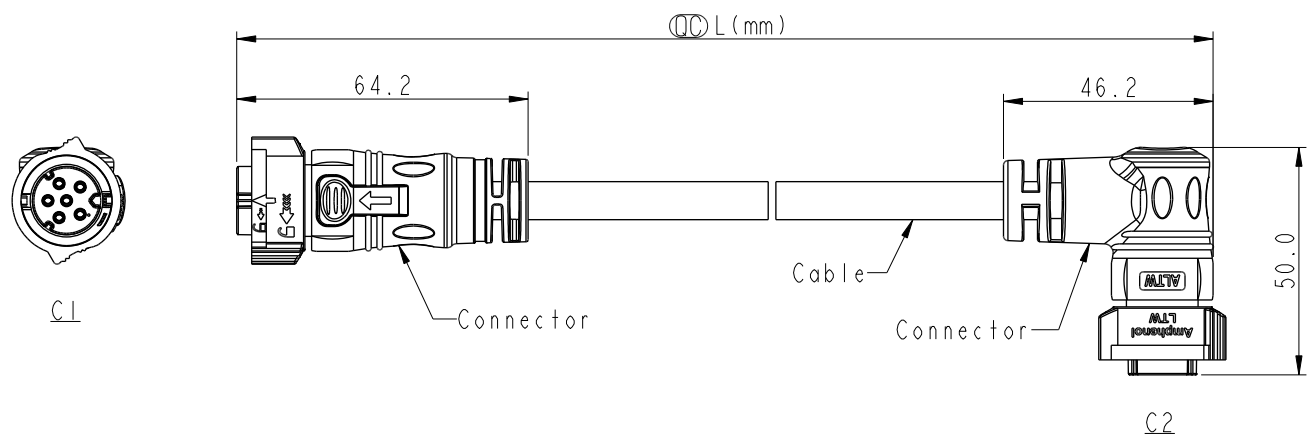

- Note:
- \*  $\text{⊕}$  Important Dimension.
  - \* Waterproof Rate: IP68, Mated.  
IP68: 1M depth of water in 24 hours.
  - \* Connector: Thermoplastic, Black
  - \* Pin: Copper Alloy, Gold Plated.
  - \* Cable: UL21388, PVC Jacket, Black.
  - \* Cable Length Tolerance:
    - 0.5M: +60/-0mm
    - 01M: +60/-0mm
    - 02~03M: +120/-0mm
    - 04~05M: +160/-0mm
    - 06~10M: ±100mm
    - 11~20M: ±200mm
    - 21~30M: ±300mm
    - 31~99M: ±500mm

UNIT: mm	
TOLERANCE	±0.5 mm

TITLE ACC, XLOK, C-10A, DB-ENDED FF			
SCALE 1:2	SIZE A4	SHEET 1 OF 2	
REV. A	WC-REV.	$\text{⊕}$ : Inspection item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Ruru	DATE 2020-01-02
DWG NO. AB-CBXXFL-CBFR-QDXXX	CHECKED BY Rita	DATE 2020-01-02
CUSTOMER ALTW	APPROVED BY Max	DATE 2020-01-02

