




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/02/03	Vicky	Initial Released

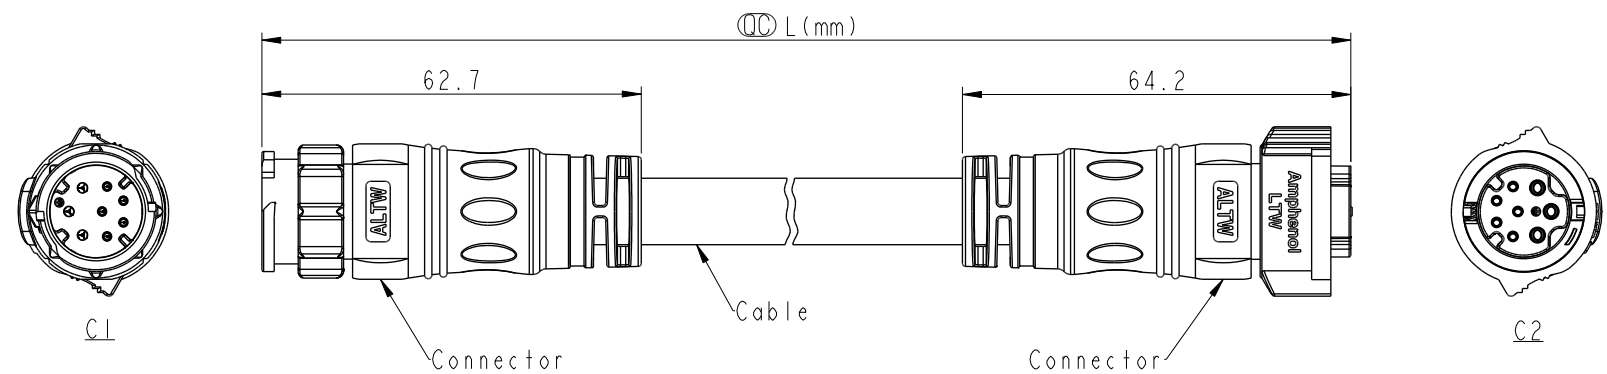

C2  
Pin Assignments  
Front View



C1  
Pin Assignments  
Front View

8	Drain (26AWG)	地線	Twist 對線
7	Blue (26AWG)	藍	
6	Red (26AWG)	紅	Twist 對線
5	Green (26AWG)	綠	
4	White (26AWG)	白	
3	Black (16AWG)	黑	
2	Green (16AWG)	綠	
1	White (16AWG)	白	
C1 & C2	Wire Color		
Pin Out			

AB-CBD XX ML-CBDFL-QF XXX  
08: 8Pin

XXX: 0.5~99Meters  
A05: 0.5 Meter  
001: 01 Meter  
002: 02 Meters  
:  
099: 99 Meters

Note:  
 \*  $\varnothing$  Important Dimension  
 \* Waterproof Rate: IP68, Mated  
 IP68: 1M depth of water in 24hours  
 \* Connector: Thermoplastic, Black  
 \* Pin: Copper Alloy, Gold Plated  
 \* Cable: UL21996, 16#\*3C+(26#\*2P+D+AL/MY)+AL/MY, PVC Jacket, Black, OD11.0mm  
 \* Cable Length Tolerance: 0.5M: +60/-0mm  
 01M: +60/-0mm  
 02~03M: +120/-0mm  
 04~05M: +160/-0mm  
 06~10M: ±100mm  
 11~20M: ±200mm  
 21~30M: ±300mm  
 31~99M: ±500mm

UNIT:mm TOLERANCE ±0.5mm	TITLE ACC, XLOK, C-10A+5A, DB-ENDED MF		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY Vicky	DATE 2020-02-03
	SCALE 33:100	SIZE A4			SHEET 1	OF 1	DWG NO AB-CBDXXML-CBDFL-QFXXX
	REV. A	WC-REV. A.5	$\varnothing$ : Inspection item		CUSTOMER ALTW	APPROVED BY Max	DATE 2020-02-03
							8 W10814-03-001A2