




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/02/03	Vicky	Initial Released

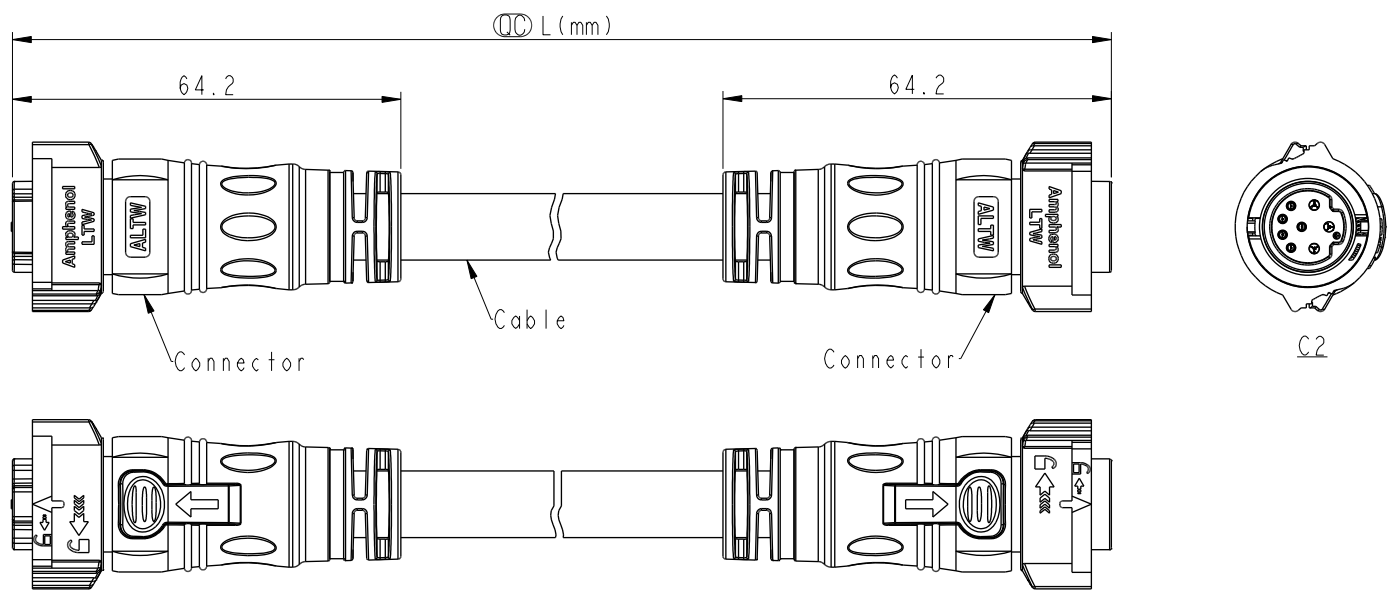

C2  
Pin Assignments  
Front View



C1  
Pin Assignments  
Front View

AB-CBD XX FL-CBDBL-QF XXX

08: 8Pin

XXX: 0.5~99Meters  
 A05: 0.5 Meter  
 001: 01 Meter  
 002: 02 Meters  
 :  
 099: 99 Meters

Note:

- \*  $\varnothing$  Important Dimension
- \* Waterproof Rate: IP68, Mated  
IP68: 1M depth of water in 24hours
- \* Connector: Thermoplastic, Black
- \* Pin: Copper Alloy, Gold Plated
- \* Cable: UL21996, 16#\*3C+(26#\*2P+D+AL/MY)+AL/MY, PVC Jacket, Black, OD11.0mm
- \* Cable Length Tolerance: 0.5M: +60/-0mm  
 01M: +60/-0mm  
 02~03M: +120/-0mm  
 04~05M: +160/-0mm  
 06~10M: ±100mm  
 11~20M: ±200mm  
 21~30M: ±300mm  
 31~99M: ±500mm

8	Drain (26AWG)	地線	Twist 對線
7	Blue (26AWG)	藍	
6	Red (26AWG)	紅	Twist 對線
5	Green (26AWG)	綠	
4	White (26AWG)	白	
3	Black (16AWG)	黑	
2	Green (16AWG)	綠	
1	White (16AWG)	白	
C1 & C2	Wire Color		
Pin Out			

UNIT:mm	$\varnothing$	
TOLERANCE	±0.5mm	

TITLE ACC, XLOK, C-10A+5A, DB-ENDED FF		
SCALE 33:100	SIZE A4	SHEET 1 OF 2
REV. A	WC-REV. A.5	$\varnothing$ : Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2020-02-03
DWG NO AB-CBDXXFL-CBDBL-QFXXX	CHECKED BY Rita	DATE 2020-02-03
CUSTOMER ALTW	APPROVED BY Max	DATE 2020-02-03