
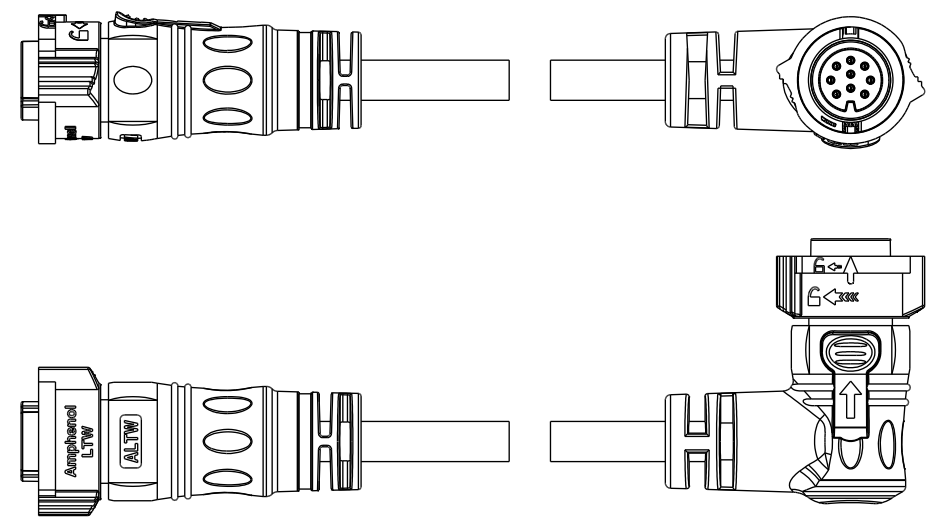


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/08	Ruru	Initial Released

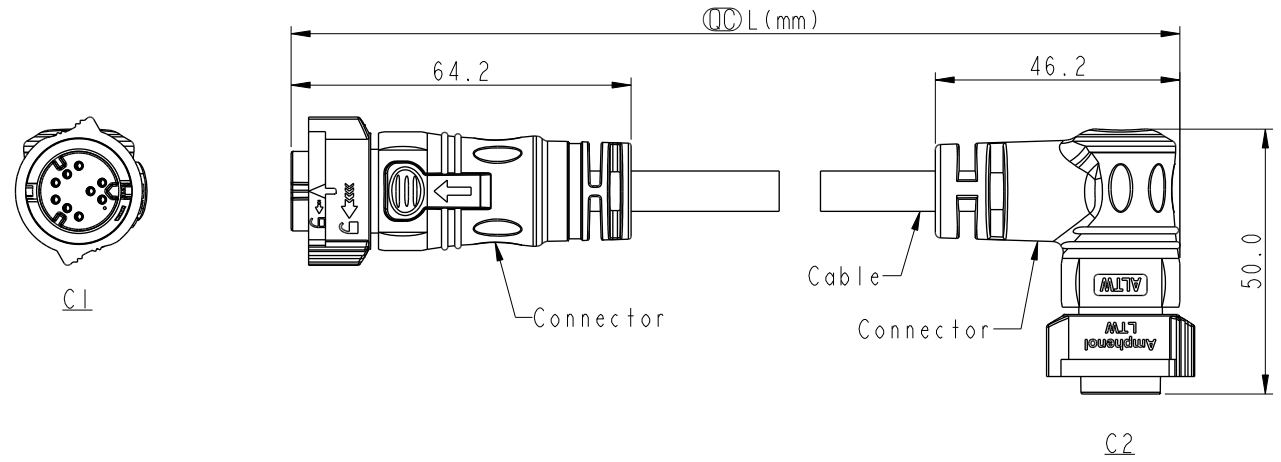

Note:
 * \varnothing Important Dimension.
 * Waterproof Rate: IP68, Mated.
 IP68: 1M depth of water in 24 hours.
 * Connector: Thermoplastic, Black.
 * Pin: Copper Alloy, Gold Plated.
 * Cable: UL21388, PVC Jacket, Black.
 * Cable Length Tolerance: 0.5M: +60/-0mm
 01M: +60/-0mm
 02~03M: +120/-0mm
 04~05M: +160/-0mm
 06~10M: ±100mm
 11~20M: ±200mm
 21~30M: ±300mm
 31~99M: ±500mm

UNIT:mm		TITLE	ACC, XLOK, C-5A, DB-ENDED FF
TOLERANCE	±0.5 mm	SCALE	1:2
		SIZE	A4
		SHEET	1 OF 2
		REV.	A
		WC-REV.	
		\varnothing	Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2020-01-08
DWG NO	CHECKED BY	DATE
AB-CDXXFL-CDBR-QDXXX	Rita	2020-01-08
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2020-01-08

