
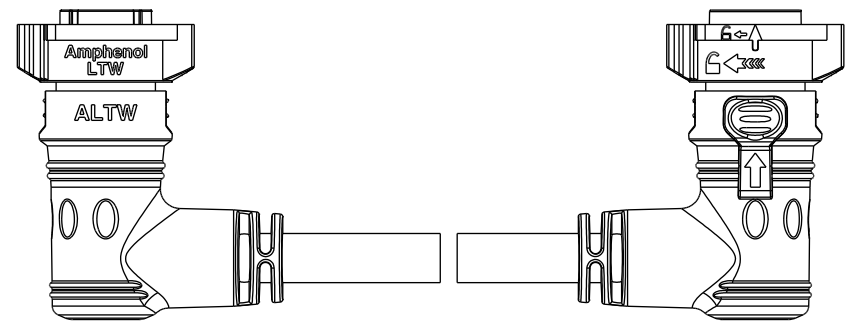
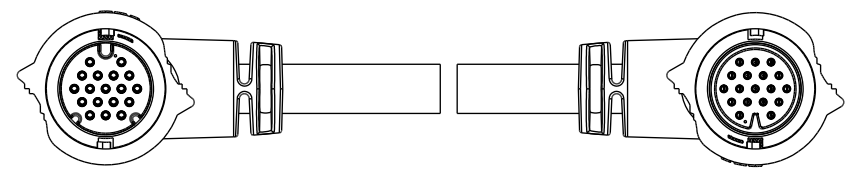


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/14	Ruru	Initial Released

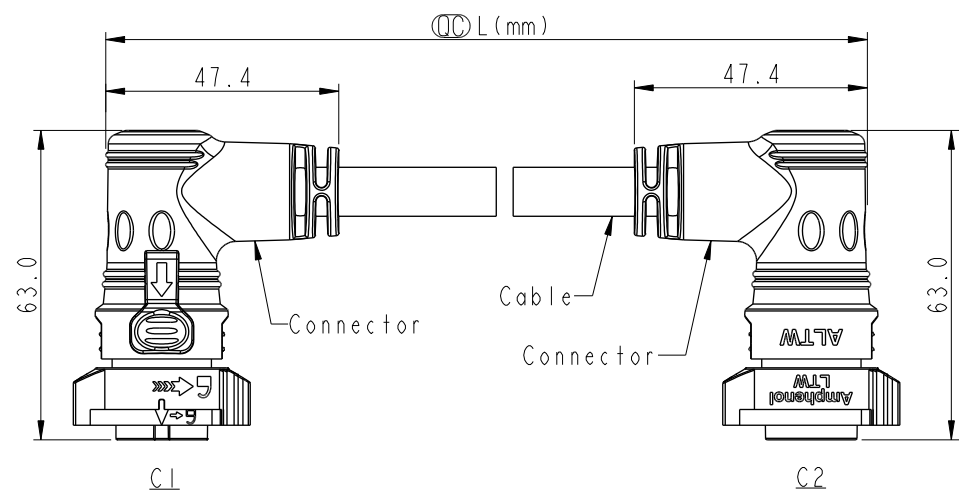

- Note:
- * \varnothing Important Dimension.
 - * Waterproof Rate: IP68, Mated.
IP68: 1M depth of water in 24 hours.
 - * Connector: Thermoplastic, Black.
 - * Pin: Copper Alloy, Gold Plated.
 - * Cable: UL21388, PVC Jacket, Black.
 - * Cable Length Tolerance: 0.5M: +60/-0mm
01M: +60/-0mm
02~03M: +120/-0mm
04~05M: +160/-0mm
06~10M: ±100mm
11~20M: ±200mm
21~30M: ±300mm
31~99M: ±500mm

UNIT: mm		
TOLERANCE	±0.5 mm	

TITLE ACC, XLOK, D-5A, DB-ENDED FF		
SCALE 1:2	SIZE A4	SHEET 1 OF 2
REV. A	WC-REV.	\varnothing : Inspection item


Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Ruru	DATE 2020-01-14
DWG NO. AB-DDXXFR-DDBR-QDXXX	CHECKED BY Rita	DATE 2020-01-14
CUSTOMER ALTW	APPROVED BY Max	DATE 2020-01-14

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

18P		PVC	10	20	AB-DD18FR-DDBR-QDXXX
14P			8.5		AB-DD14FR-DDBR-QDXXX
Contacts	Cable Jacket	Cable OD	AWG	Item No.	

Pin Out	14	Brown/White	棕/白	18	Blue/White	藍/白
	13	Black/White	黑/白	17	Green/White	綠/白
	12	Light Green	淡綠	16	Orange/White	橙/白
	11	Pink	粉紅	15	Red/White	紅/白
	10	White	白	14	Brown/White	棕/白
	9	Gray	灰	13	Black/White	黑/白
	8	Purple	紫	12	Light Green	淡綠
	7	Blue	藍	11	Pink	粉紅
	6	Green	綠	10	White	白
	5	Yellow	黃	9	Gray	灰
	4	Orange	橙	8	Purple	紫
	3	Red	紅	7	Blue	藍
	2	Brown	棕	6	Green	綠
	1	Black	黑	5	Yellow	黃
Pin #	Wire	Pin #	Wire	Pin #	Wire	

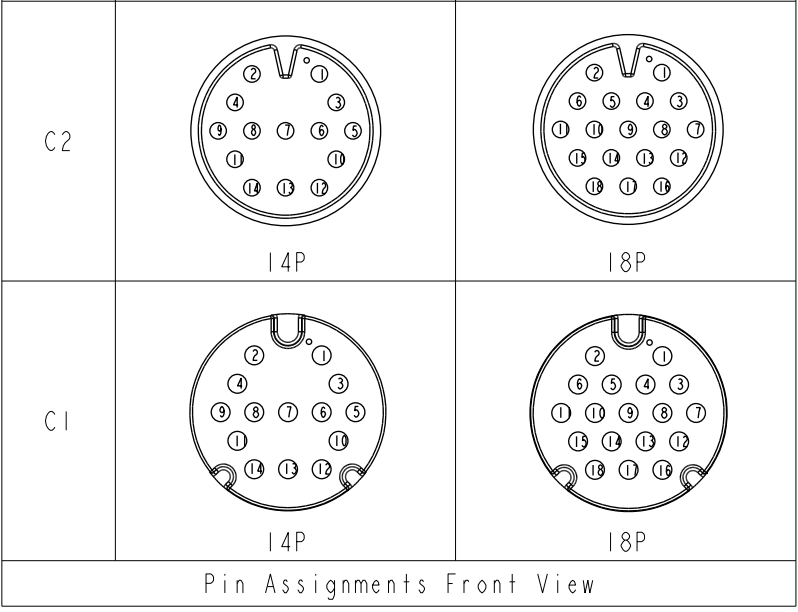

UNIT:mm		TITLE	ACC, XLOK, D-5A, DB-ENDED FF		
TOLERANCE	± 0.5 mm	SCALE	1:2	SIZE	A4
		REV.	A	WC-REV.	
				SHEET	2 OF 2
				☉: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
ALTW	Ruru	2020-01-14
	Rita	2020-01-14
	Max	2020-01-14