




| | | | | |
|------|---------|------|------|-------------|
| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
| | | | | |

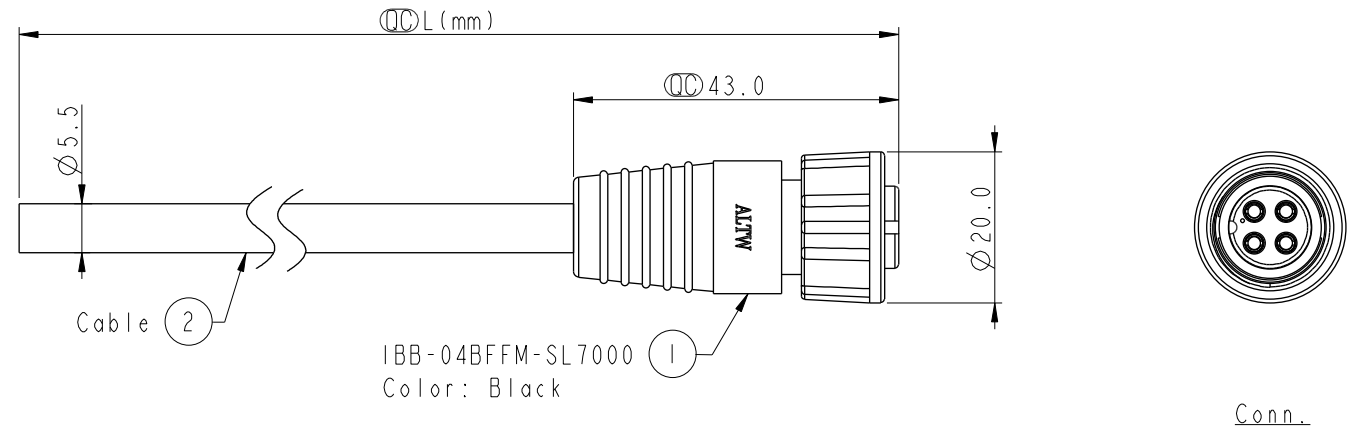

IBB-04BFFM-SL7000
Color: Black



Pin Assignments
Front View



IBB-04BFFM-SL7A_{XX}

- ↑
- XX : 01~99Meters
- 01 : 01Meter
- 02 : 02Meters
- ...
- 99 : 99Meters

Cable Length(L): 01~99Meters

- Note:
- * \varnothing Important Dimension To Check
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 20AWG*4C+D+AL/My
PVC Jacket UV Resistant, OD=5.5, Black
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

| | | |
|---------|------------|---|
| 4 | White | 白 |
| 3 | Black | 黑 |
| 2 | Blue | 藍 |
| 1 | Brown | 棕 |
| Conn. | Wire Color | |
| Pin Out | | |

| | |
|-----------|---------|
| UNIT:mm | |
| TOLERANCE | ± 0.5mm |

| | | | |
|--|----------------|---------------------------------|--|
| TITLE STANDARD CNC PIN CABLE SCREW 4PIN F CONN F PIN | | | |
| SCALE 1:1 | SIZE A4 | SHEET 1 OF 1 | |
| REV. A | WC-REV. A.1 | \varnothing : Inspection item | |

Amphenol LTW
安費諾亮泰企業股份有限公司

| | | |
|---|-----------------------|--------------------|
| ITEM NO | DRAWN BY Ruru | DATE 2014-01-20 |
| DWG NO IBB-04BFFM-SL7A _{XX} | CHECKED BY Tony | DATE 2014-01-20 |
| CUSTOMER ALTW | APPROVED BY Victor | DATE 2014-01-20 |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.