
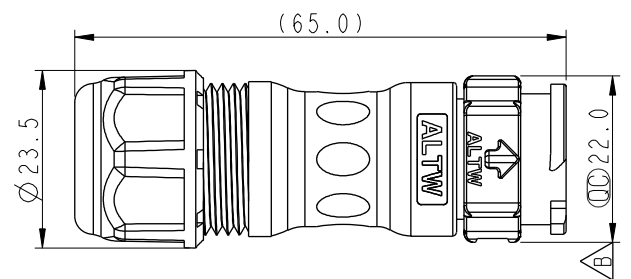


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2016/11/23	Victor Hung	Change Eev.01 To Rev.A
B	CI92027	2019/11/21	Vicky	$\triangle B$ X4

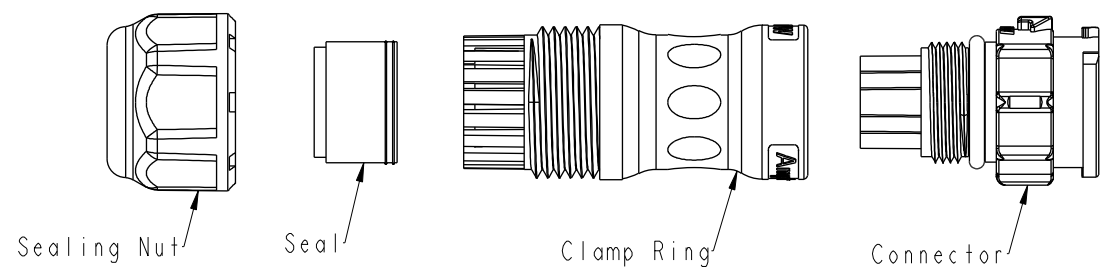

CD-XXBMMA-QL8XN0

08- 8Pin
 09- 9Pin
 10-10Pin
 12-12Pin

S: With Red Color Seal 1, Cable OD 6.0~8.0mm.
 M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm.
 L: With Blue Color Seal 3, Cable OD 10.0~12.0mm.
 A: With Seal 1 & Seal 2 & Seal 3.

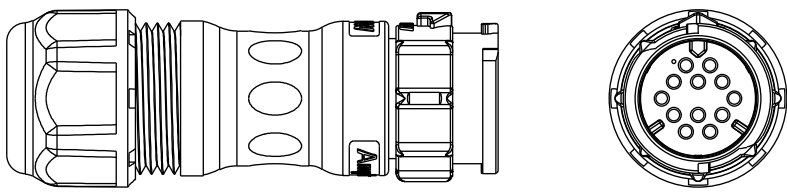

Pin Assignments Front View	8 Pin	9 Pin	10 Pin	12 Pin

- $\triangle B$ Note:
- * CC Important Dimension
 - * Waterproof Rate: IP68, Mated IP68: 1M Depth Of Water In 24hours
 - * Housing: Thermoplastic, Black
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seals: Rubber

UNIT:mm		TITLE	XLOK, C-5A, CABLE W/O SR M, M, FI CRIMP, XLOK	
TOLERANCE	$\pm 0.5\text{mm}$	SCALE	1:1	SIZE A4
		REV.	B	WC-REV. A.5
			CC : Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRWN BY	DATE
	Victor Hung	2016-11-23
DWG NO	CHECKED BY	DATE
CD-XXBMMA-QL8XN0 $\triangle B$	Wes Fan	2016-11-23
CUSTOMER	APPROVED BY	DATE
ALTW	Kevin Hu	2016-11-23