




REV.	ECN NO.	DATE	SIGN	DESCRIPTION

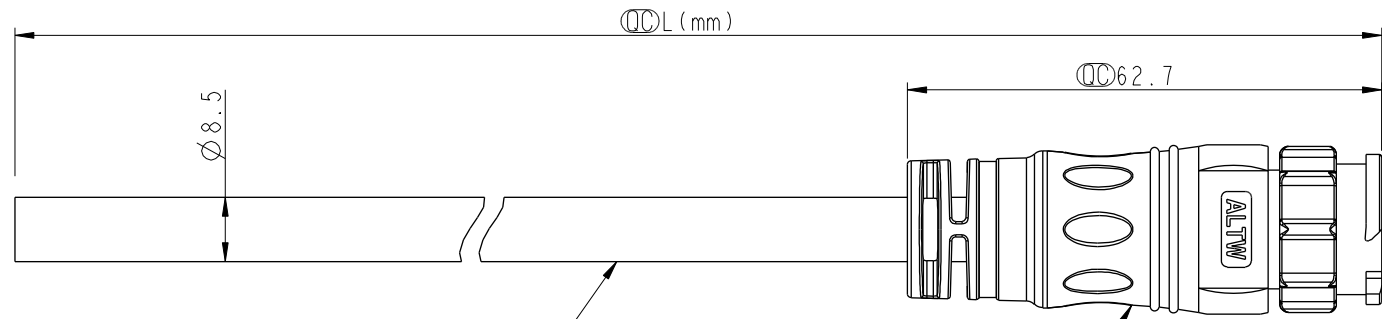

Conn.


Cable ②

CD-12AMMM-QL8W00 ①
Color: Black



Note:

- * \varnothing Important Dimension To Check.
- * Working Voltage Rating: AC 300 V
- * Working Current Rating: 5A
- * Flame Class: UL94V-0 (UV Resistance)
- * Waterproof Rate: IP68(Mated)
- * Housing: Nylon+GF, Black.
- * Male Pin :Copper Alloy, Gold Plated
- * Cable: UL21388 20AWG*12C+AL.Mylar Black, PVC Jacket UV Resistant, OD=8.5
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

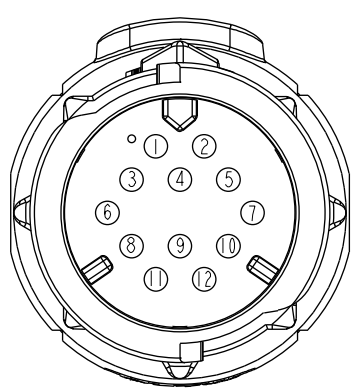

Pin Assignments
Front View

12	Light Green	淡綠
11	Pink	粉紅
10	White	白
9	Gray	灰
8	Purple	紫
7	Blue	藍
6	Green	綠
5	Yellow	黃
4	Orange	橙
3	Red	紅
2	Brown	棕
1	Black	黑
Conn.	Wire Color	Pin Out

CD-12AMMM-QL8DXX

↑
XX :01~99Meters
01 :01Meter
02 :02Meters
:
:
99 :99Meters

UNIT:mm	
TOLERANCE	±0.5

TITLE X Lok C-Size Cable 12 Pin 5A M Conn. M Pin			
SCALE	SIZE	SHEET	OF
1:1	A4	1	1
REV.	WC-REV.	\varnothing : Inspection item	
A	A.1		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Micky	2014-12-11
DWG NO	CHECKED BY	DATE
CD-12AMMM-QL8DXX	Spring	2014-12-11
CUSTOMER	APPROVED BY	DATE
ALTW	Kevin	2014-12-11

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.