



| | | | |
|------|---------|------|------|
| 5 | 6 | 7 | 8 |
| REV. | ECN NO. | DATE | SIGN |
| | | | |
| | | | |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

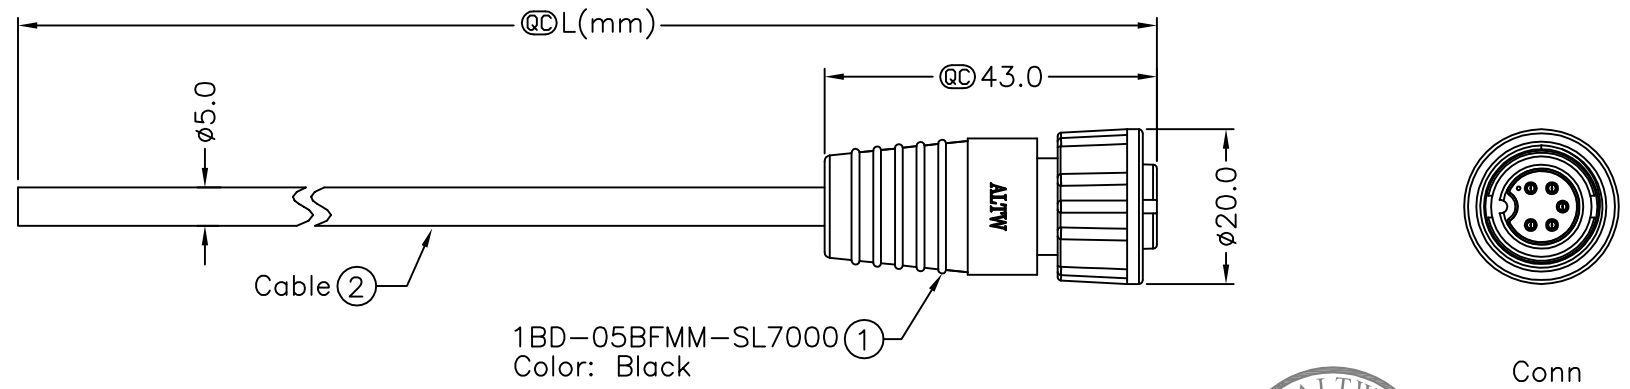


1BD-05BFMM-SL7AXX

- XX:01~99Meters
- 01:01 Meters
- 02:02 Meters
- ...
- 99:99 Meters

Cable Length(L):01~99Meters

- Note :
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black.
 - * Male Pin: Copper Alloy, Gold Plated.
 - * Cable: UL2464 24AWG*5C+D+AL/My PVC Jacket UV Resistant, OD=5, Black.
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm



Pin Assignments Front View

| | | |
|-------|------------|---|
| 5 | Green | 綠 |
| 4 | White | 白 |
| 3 | Black | 黑 |
| 2 | Blue | 藍 |
| 1 | Brown | 棕 |
| Conn. | Wire Color | |
| | Pin Out | |

| | |
|-----------|---------|
| UNIT:mm | |
| TOLERANCE | ±0.5 mm |

| | | | |
|-------------------------------|------|---------------------|--------|
| TITLE | | STANDARD CNC PIN | |
| CABLE SCREW 5PIN F CONN M PIN | | | |
| SCALE | Free | SHEET | 1 OF 1 |
| REV. | A | SIZE | A4 |
| | | @C :Inspection Item | |

Amphenol LTW
安費諾亮泰企業股份有限公司

| | |
|----------|-------------------|
| ITEM NO | |
| DWG NO | 1BD-05BFMM-SL7AXX |
| CUSTOMER | ALTW |

| | |
|-------------|--------|
| DRAWN BY | Ruru |
| CHECKED BY | Tony |
| APPROVED BY | Victor |

| | |
|------|------------|
| DATE | 2013/11/27 |
| DATE | 2013/11/27 |
| DATE | 2013/11/27 |

A B C D E F 1 2 3 4 5 6 7 8