
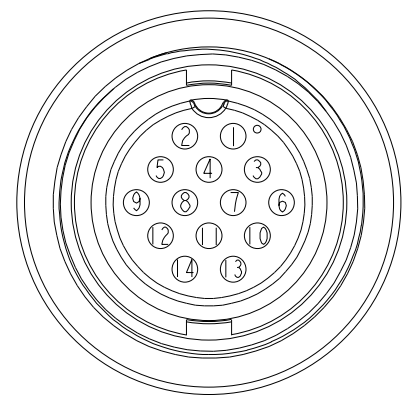




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

| | | | | |
|------|---------|------|------|-------------|
| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
| | | | | |

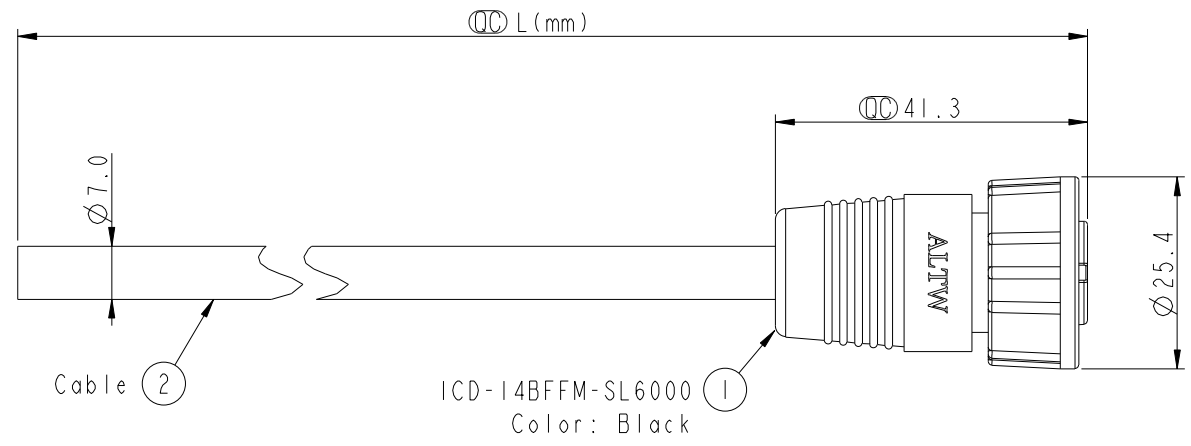

Pin Assignments
Front View

| | | |
|-------|-------------|---------|
| 14 | Brown/White | 棕/白 |
| 13 | Black/White | 黑/白 |
| 12 | Light Green | 淺綠 |
| 11 | Purple | 紫 |
| 10 | Orange | 橙 |
| 9 | Black | 黑 |
| 8 | Red | 紅 |
| 7 | Pink | 粉紅 |
| 6 | Gray | 灰 |
| 5 | Yellow | 黃 |
| 4 | Green | 綠 |
| 3 | White | 白 |
| 2 | Blue | 藍 |
| 1 | Brown | 棕 |
| Conn. | Wire Color | Pin Out |

ICD-14BFFM-SL6AXX
 XX : 01~99Meters
 01 : 01Meter
 02 : 02Meters
 :
 :
 99 : 99Meters
 Cable Length(L):01~99Meters

- Note:
- * \varnothing Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * Screw Nut: Nylon+GF, Black.
 - * O-Ring: Silicon, Gray
 - * Cable: UL2464 24AWG*14C+Drain+Al/My PVC Jacket UV Resistant, OD=7.0, Black.
 - * Cable Length Tolerance: 01M:40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

| | | |
|-----------|------|--|
| UNIT:mm | | |
| TOLERANCE | ±0.5 | |

| | | | |
|---|----------------|---------------------------------|--|
| TITLE MIDDLE CNC PIN CABLE SCREW 14P F CONN F PIN | | | |
| SCALE 1:1 | SIZE A4 | SHEET 1 OF 1 | |
| REV. A | WC-REV. A.2 | \varnothing : Inspection item | |

Amphenol LTW
 安費諾亮泰企業股份有限公司

| | | |
|-----------------------------|------------------------|--------------------|
| ITEM NO | DRAWN BY Jiazhen_Li | DATE 2014-01-11 |
| DWG NO ICD-14BFFM-SL6AXX | CHECKED BY Ruru | DATE 2014-01-11 |
| CUSTOMER ALTW | APPROVED BY Jerry | DATE 2014-01-11 |