

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2017/06/24	Mafei	Change Revision From 01 To A



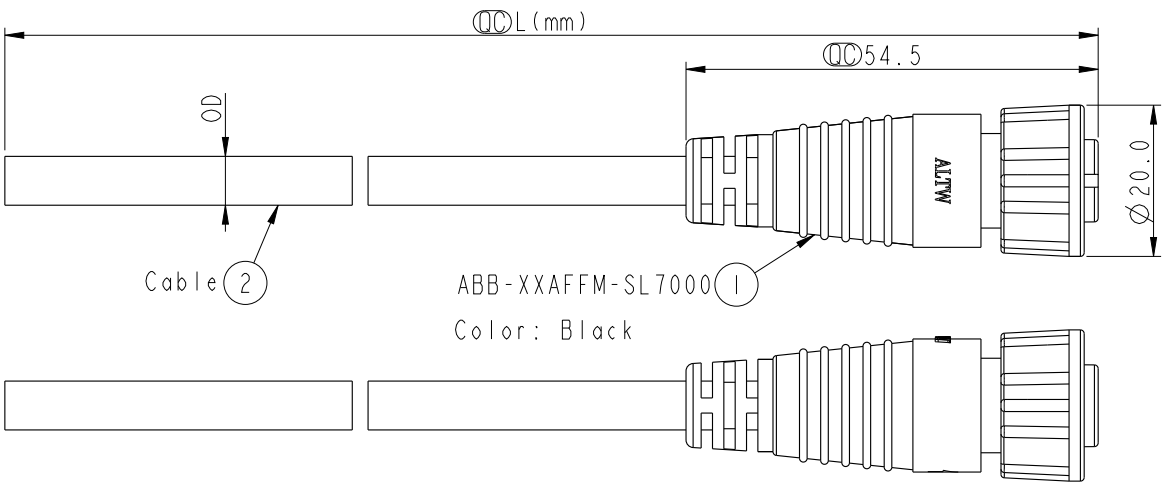



ABB-XXAFFM-SL7000
Color: Black

4P	PVC	5.5	20	ABB-04AFFM-SL7AXX
3P		5.0		ABB-03AFFM-SL7AXX
2P		5.8		ABB-02AFFM-SL7AXX
Contacts	Cable Jacket	Cable OD	AWG	Item No.

4 White 白	3 Yellow 黃	2 Red 紅
3 Black 黑	2 White 白	1 Green 綠
2 Blue 藍	1 Black 黑	
1 Brown 棕		
Pin # Wire	Pin # Wire	Pin # Wire

ABB-XXAFFM-SL7AXX
02: 2Pin
04: 4Pin
XX : 01~99Meters
01 : 01Meter
02 : 02Meters
99 : 99Meters
Cable Length(L): 01~99Meters

Note:
 * \varnothing Important Dimension To Check.
 * Waterproof Rate: IP67
 * Housing: Nylon+GF, Black.
 * Female Pin: Copper Alloy, Tin Plated.
 * Cable: UL2464 20AWG+D+AL/My
 PVC Jacket UV Resistant, Black.
 * Cable Length Tolerance: 01M: 40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm

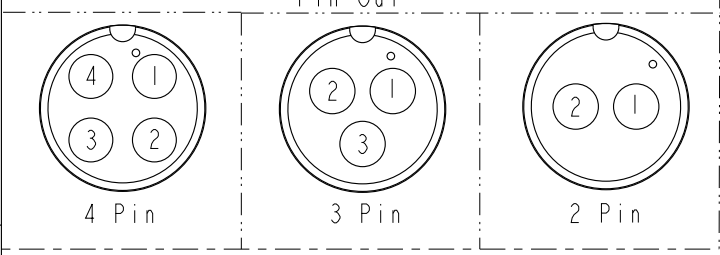

Pin Assignments Front View

UNIT:mm		TITLE
TOLERANCE	±0.5	STANDARD CABLE SCREW F CONN F PIN
SCALE	1:2	SIZE A4
REV.	A	SHEET 1 OF 1
WC-REV.	A.1	\varnothing : Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Mafei	2017-06-24
DWG NO	CHECKED BY	DATE
ABB-XXAFFM-SL7AXX	Jerry	2017-06-24
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2017-06-24