
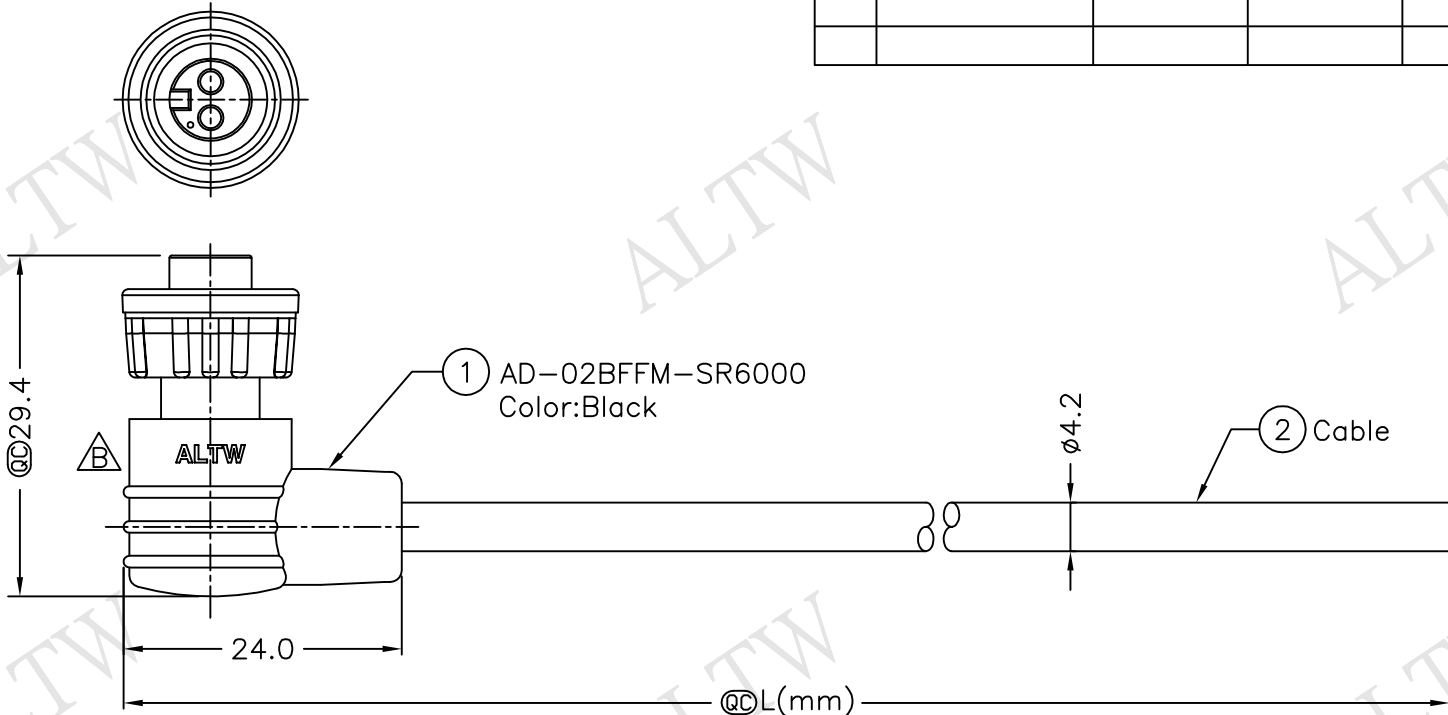




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN15B0128~132	2015/11/05	Vicky	Update Logo & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



AD-02BFFM-SR6AXX
 ↑
 XX:01~99Meters
 01:01Meter
 02:02Meters
 ⋮
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*2C+Drain+Al/My, Black, PVC Jacket, UV Resistant, OD=4.2mm
 - * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

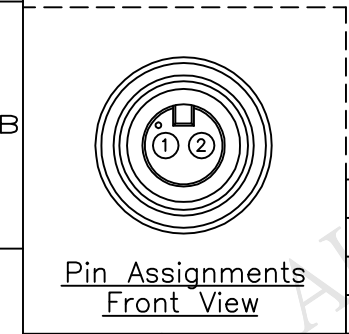

2	Red	紅
1	Black	黑
Conn.	Wire Color	
	Pin Out	

UNIT:mm TOLERANCE ±0.5mm	TITLE Mini Cable Screw 2Pin F Conn F Pin		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Vicky	DATE 2015/11/05
	SCALE Free	SHEET 1 OF 1		DWG NO AD-02BFFM-SR6AXX	CHECKED BY Rita	DATE 2015/11/05
REV. B	SIZE A4	@C :Inspection Item	CUSTOMER ALTW	APPROVED BY Lisa	DATE 2015/11/05	