


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN-910013~016	2009/01/05	Ivan Lin	Update panel thickness.
E	LEN1380086~090	2013/08/08	Vicky	Update Cable OD.
F	LEN15B0232~236	2015/11/03	Ruru	Change Logo


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. CONFIDENTIAL AND PROPRIETARY INFORMATION. THIS IS THE PROPERTY OF AMPHENOL LTW. ALL RIGHTS RESERVED.

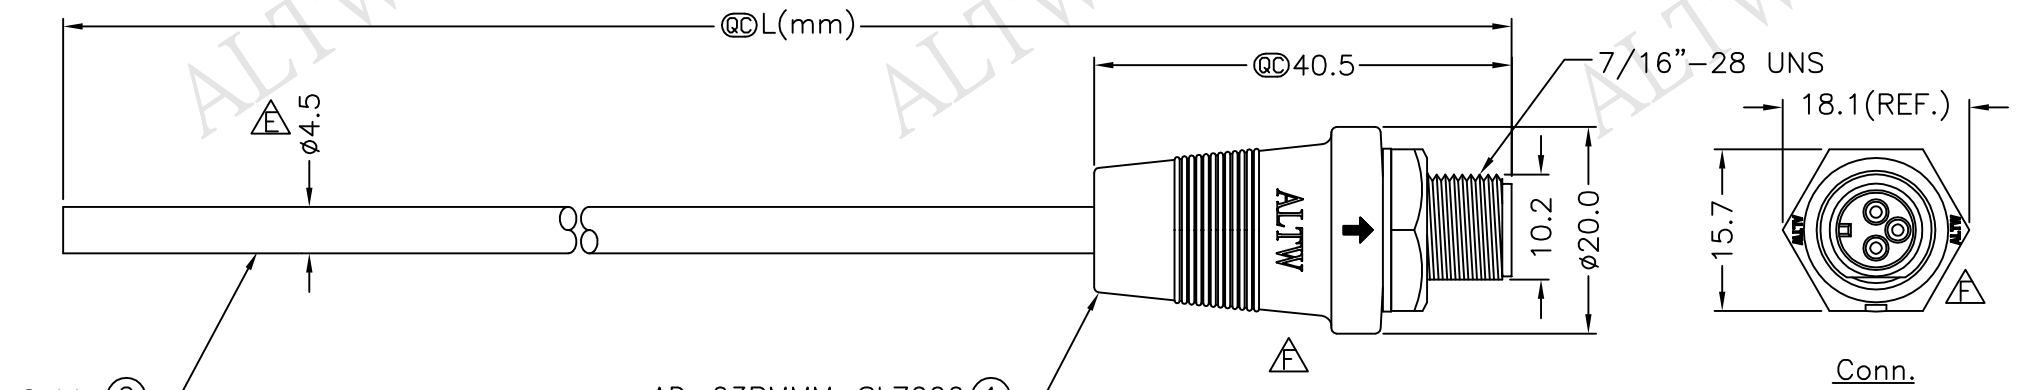

AD-03PMMM-SL7000 (1)
Color: Black

AD-03PMMM-SL7AXX
XX:01~99Meters
01:01Meter
02:02Meters
:
:
99:99Meters
Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*3C+Drain+A, Black, PVC Jacket, UV Resistant, OD=4.5mm
 - △△* Use with waterproof cap or dust cap For Panel Thickness Max: 2.5mm
 - △△* Use without waterproof cap or dust cap For Panel Thickness Max: 3.5mm
 - △* Cable Length Tolerance: 01M:40mm
02M~05M:60mm
06M~10M:100mm
11M~30M:200mm
31M~99M:500mm

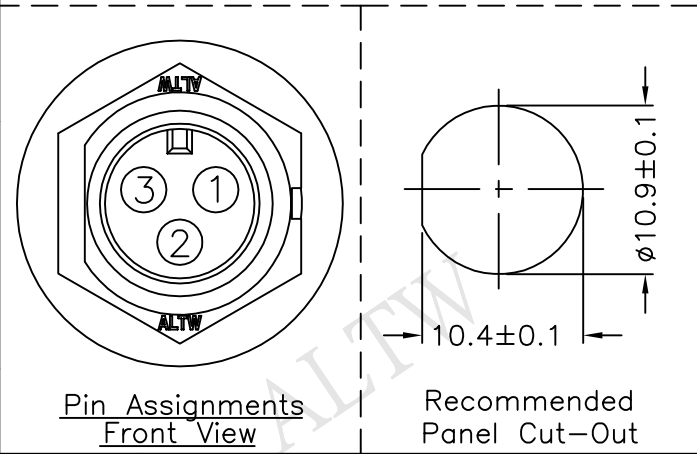

3	Black	黑
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

UNIT:mm		TOLERANCE		TITLE		SCALE		SHEET		REV.		SIZE		CUSTOMER		DRAWN BY		DATE	
±0.5 mm				Mini Cable Screw 3P M Conn M Pin		Free		1 OF 1		F		A4		ALTW		Ruru		2015/11/03	
				Amphenol LTW										AD-03PMMM-SL7AXX		Rita		2015/11/03	
				安費諾亮泰企業股份有限公司										APPROVED BY		Lisa		2015/11/03	