



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0315~318	2010/11/26	Ivan Lin	Change View & Frame
C	LEN15B0162~165	2015/11/06	Vicky	Update Logo

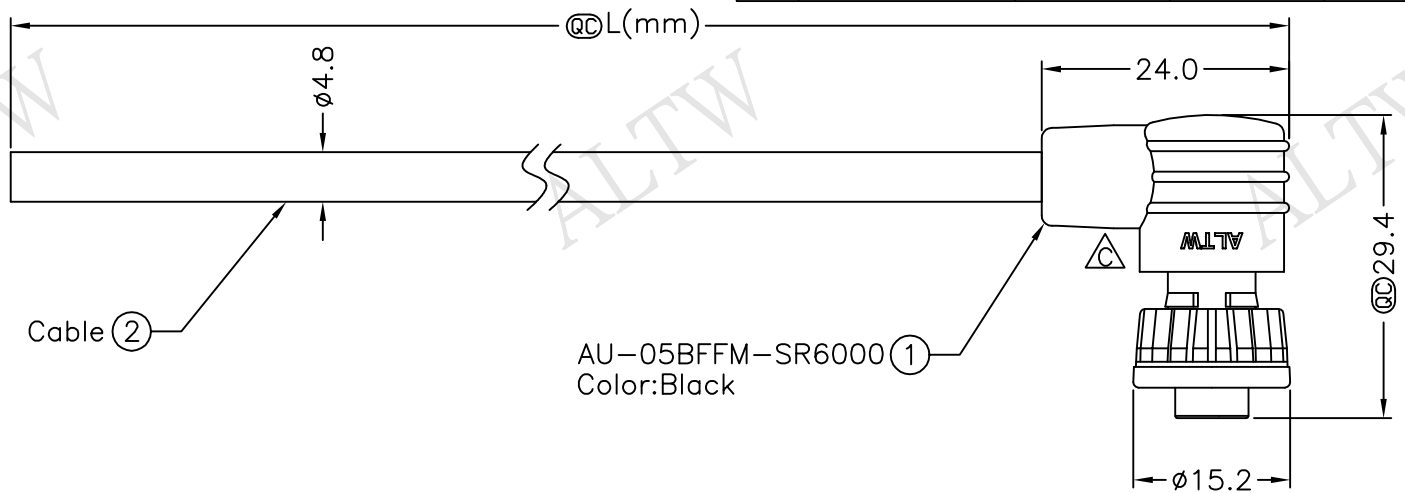




AU-05BFFM-SR6AXX  
 XX:01~99Meters  
 01:01Meter  
 02:02Meters  
 :  
 :  
 99:99Meters  
 Cable Length(L):01~99Meters

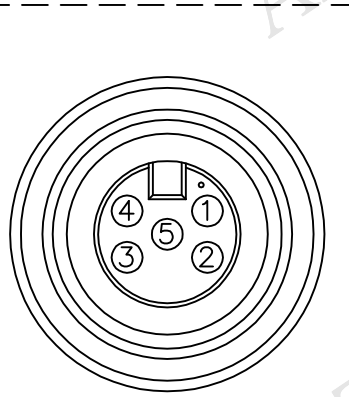

Pin Assignments  
Front View

Yellow	黃	5
White	白	4
Red	紅	3
Brown	棕	2
Green	綠	1
Wire Color	Conn.	

Pin Out



Conn.

- Note:
- \* @C Important Dimension To Check.
  - \* Waterproof Rate: IP66
  - \* Housing:Nylon+GF ,Black
  - \* Female Pin: Copper Alloy, Gold Plated
  - \* Cable: UL2464 26AWG\*5C+Drain+Al/My, PVC Jacket, UV Resistant, OD=4.8mm, Black
  - \* Cable Length Tolerance:01M:±40mm  
 02M~05M:±60mm  
 06M~10M:±100mm  
 11M~30M:±200mm  
 31M~99M:±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Mini Cable Screw 5Pin F Conn F Pin	
SCALE	Free	SHEET 1 OF 1
REV. C	SIZE A4	@C :Inspection Item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	AU-05BFFM-SR6AXX
CUSTOMER	ALTW

DRAWN BY	Vicky
CHECKED BY	Rita
APPROVED BY	Lisa

DATE	2015/11/06
DATE	2015/11/06
DATE	2015/11/06

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.