



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D		2009/01/05	Ivan Lin	Update Panel Thickness
E	LE3-910056~9	2009/01/06	Tommy	Change Dimension
F	LEN15A0350~3	2015/10/15	Jinhai	Change Logo

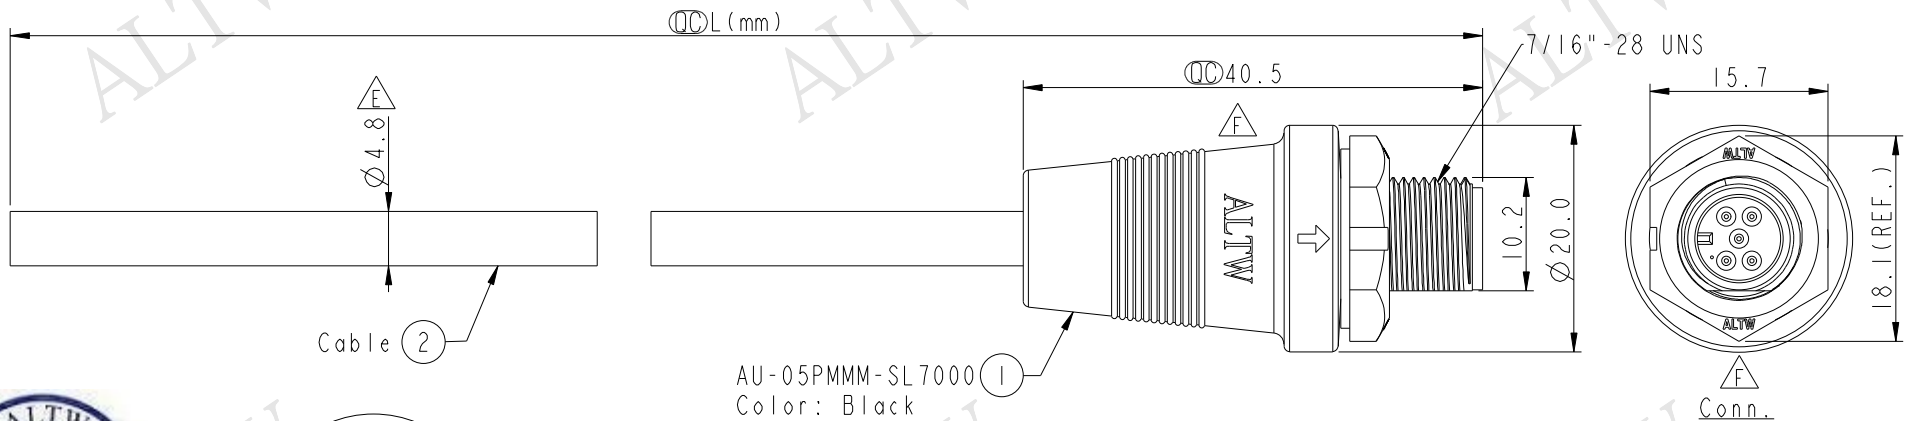

AU-05PMMM-SL7000
Color: Black

AU-05PMMM-SL7AXX
XX: 01~99Meters
01: 01Meter
02: 02Meters
:
:
99: 99Meters
Cable Length(L): 01~99Meters

- Note:
- * ⌀ Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Connector: Nylon+GF, Black
 - * Male Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 26#*5C+Drain+Al.My
PVC Jacket UV Resistant OD=4.8mm, Black
 - $\triangle\triangle C$ * Use with waterproof cap or dust cap
Panel Thickness Max: 2.5mm
 - $\triangle\triangle D$ * Use without waterproof cap or dust cap
Panel Thickness Max: 3.5mm
 - $\triangle D$ * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

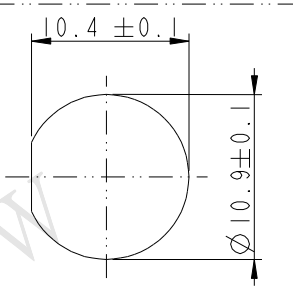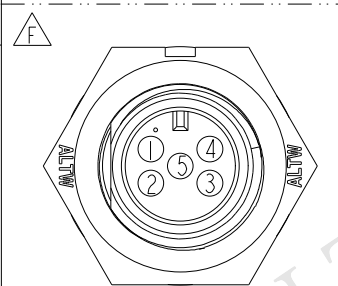

Conn.	Wire Color	Pin Out
5	Yellow 黃	
4	White 白	
3	Red 紅	
2	Brown 棕	
1	Green 綠	

UNIT: mm TOLERANCE ±0.5	TITLE Mini Cable Screw 5P M Conn. M Pin			Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY	DATE
	SCALE 3:2	SIZE A4	SHEET 1 OF 1		DWG NO AU-05PMMM-SL7AXX	CHECKED BY Tom	DATE 2015-10-15
	REV. F	WC-REV. .0	⌀ : Inspection item		CUSTOMER ALTW	APPROVED BY Jerry	DATE 2015-10-15