
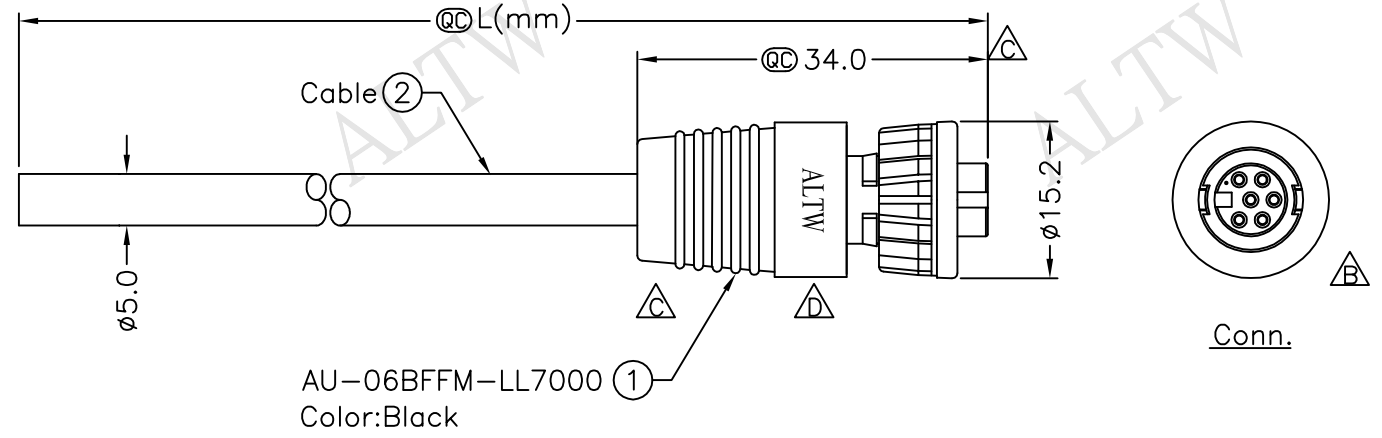




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0327~330	2010/11/26	Ivan Lin	Change View & Frame.
C	LEN1110596~599	2011/01/19	Vicky	Mini Size Molding外觀變更
D	LEN1530230~233	2014/12/17	Ruru	Change Logo

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



AU-06BFFM-LL7AXX
 ↑
 XX:01~99Meters
01:01Meter
02:02Meters
 :
 :
99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension.
 - * Waterproof Rate: IP67.
 - * Connector: Nylon+GF, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * Lock Nut: Nylon+GF, Black.
 - * O-Ring: EPDM, Black.
 - * Cable: UL2464 26AWG*6C+D+A,Black, PVC Jacket, UV Resistant, OD=5.0mm.
 - * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm



Pin Assignments
Front View

6	Gray	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

UNIT:mm		TITLE
TOLERANCE	±0.5 mm	Mini,Cable Lock 6P F Conn F Pin
SCALE	Free	SHEET 1 OF 1
REV.	D	SIZE A4 @C :Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Ruru	2014/12/17
AU-06BFFM-LL7AXX	Rita	2014/12/17
ALTW	Win	2014/12/17