


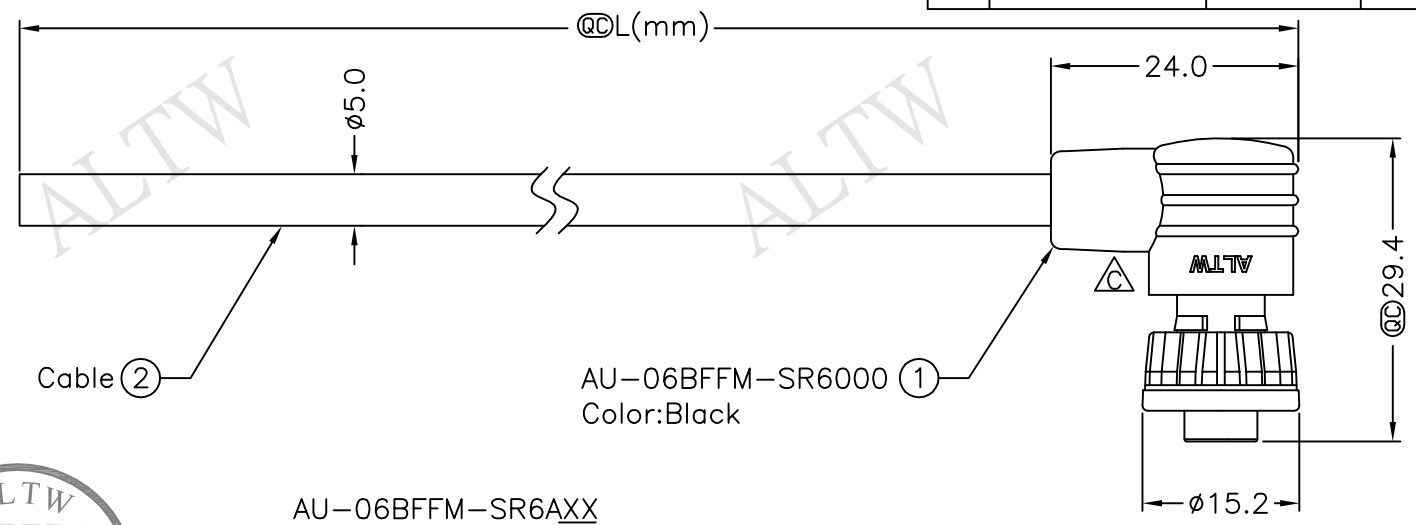


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0342~346	2010/11/26	Ivan Lin	Change View & Frame
C	LEN15B0172~176	2015/11/06	Vicky	Update Logo

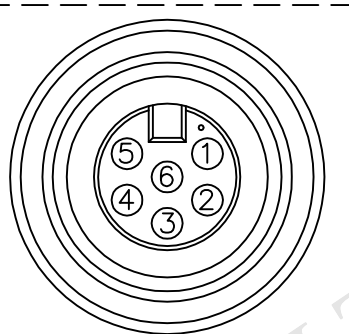


AU-06BFFM-SR6AXX
 XX:01~99Meters
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



Pin Assignments
Front View

Gray	灰	6
Yellow	黃	5
Green	綠	4
White	白	3
Blue	藍	2
Brown	棕	1
Wire Color		Conn.
Pin Out		



- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing:Nylon+GF ,Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 26AWG*6C+Drain+Al/My, PVC Jacket, UV Resistant, OD=5.0mm, Black
 - * Cable Length Tolerance:01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Mini Cable Screw 6Pin F Conn F Pin		
SCALE	Free	SHEET	1 OF 1
REV.	C	SIZE	A4 @C :Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Vicky	2015/11/06
AU-06BFFM-SR6AXX	Rita	2015/11/06
ALTW	Lisa	2015/11/06

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.