


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

5	6	7	8
REV.	ECN NO.	DATE	SIGN




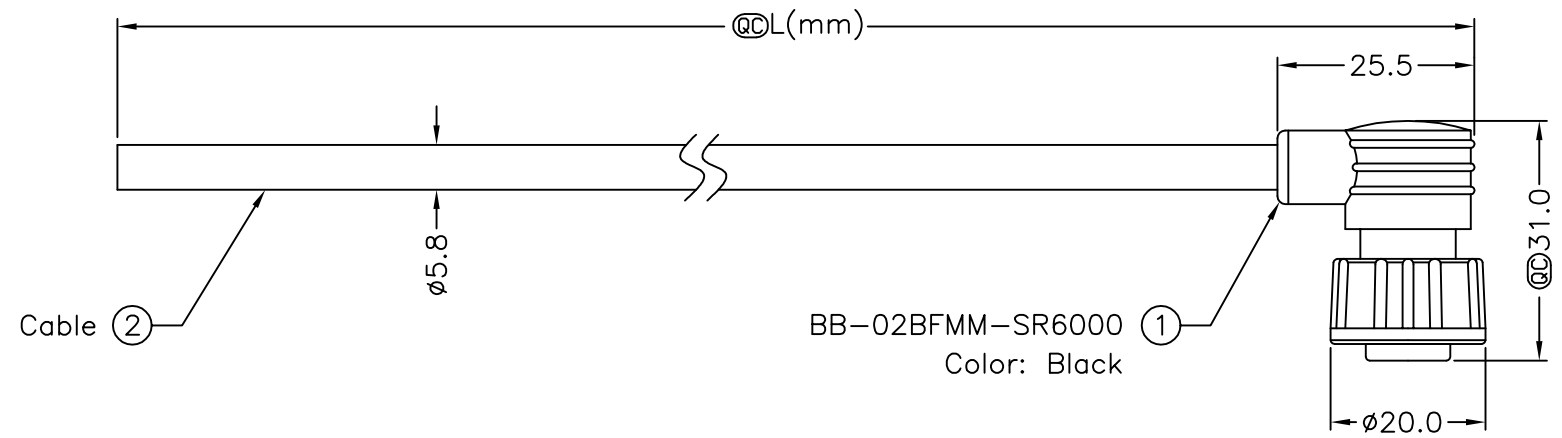


BB-02BFMM-SR6000 ①
Color: Black

BB-02BFMM-SR6AXX

- XX:01~99Meter
- 01:01Meter
- 02:02Meters
- ⋮
- 99:99Meters

Cable Length(L):01~99Meters

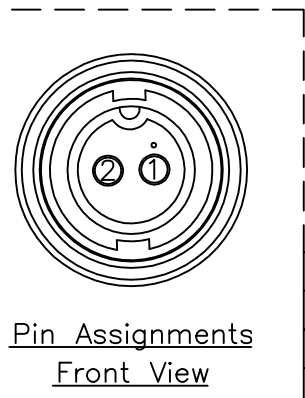

2	White
1	Black
Conn.	Wire Color
Pin Out	

Note:

- * @C Important Dimension To Check.
- * Waterproof Rate: IP66
- * Connector: Black, Nylon+GF
- * Male Pin: Copper Alloy, Gold Plated
- * Cable: Black,UL2464 20QAWG*2C+Drain +Al/My,UV Resistant, OD=5.8mm
- * Cable Length Tolerance:1M~10M±5%mm,11M~99M±500mm.

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Standard	
Cable Screw 2Pin F Conn. M Pin	
SCALE Free	SHEET 1 OF 1
REV. A	SIZE A4
@C :Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BB-02BFMM-SR6AXX
CUSTOMER	ALTW

DRAWN BY Jan Carlo De Castro	DATE 2007/03/30
CHECKED BY Robert Dabu	DATE 2007/03/30
APPROVED BY Win	DATE 2007/03/30

DATE 2007/03/30
