



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN3-960009~12	2009/02/10	Prune	Change The View
C	LEN1630017~020	2016/02/15	Ruru	Change Logo
D	LEN17B0064~067	2017/10/11	Brady	Add Pin Out Table

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

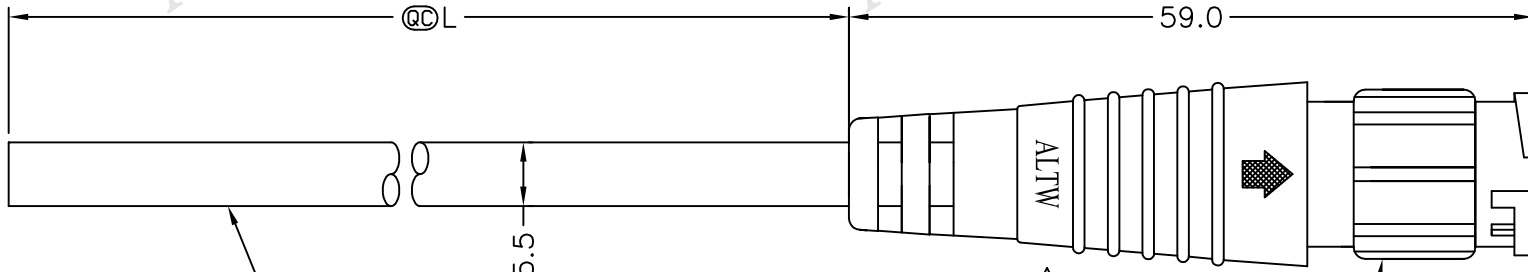


White	白	4
Black	黑	3
Blue	藍	2
Brown	棕	1
Wire Color	Conn.	
Pin Out		

BB-04AMMM-LL60XX  
 XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 ...  
 99:99Meters  
 Cable Length(L):01~99Meters



- Note:
- \* @C Important Dimension.
  - \* Waterproof Rate: IP66.
  - \* Connector: Nylon+GF, Black
  - \* Male Pin: Copper Alloy, Gold Plated.
  - \* Cable:UL2464 20AWG\*4C+D+AL/MY, Black Half Matt PVCJacket,UV Resistant,OD=5.5mm.
  - \* Cable Length Tolerance: 01M:±40mm  
 02M~05:±60mm  
 06M~10M:±100mm  
 11M~30M:±200mm  
 31M~99M:±500mm



Pin Assignments Front View

UNIT:mm	
TOLERANCE	±0.5mm

TITLE LOCK CABLE ASSEMBLY180 4PIN M CONN M PIN(10A)	
SCALE Free	SHEET 1 OF 1
REV. D	SIZE A4
@C :Inspection Item	

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BB-04AMMM-LL6AXX
CUSTOMER	ALTW

DRAWN BY Brady	DATE 2017/10/11
CHECKED BY Lodess	DATE 2017/10/11
APPROVED BY Max	DATE 2017/10/11