



5	6	7	8
REV.	ECN NO.	DATE	SIGN

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



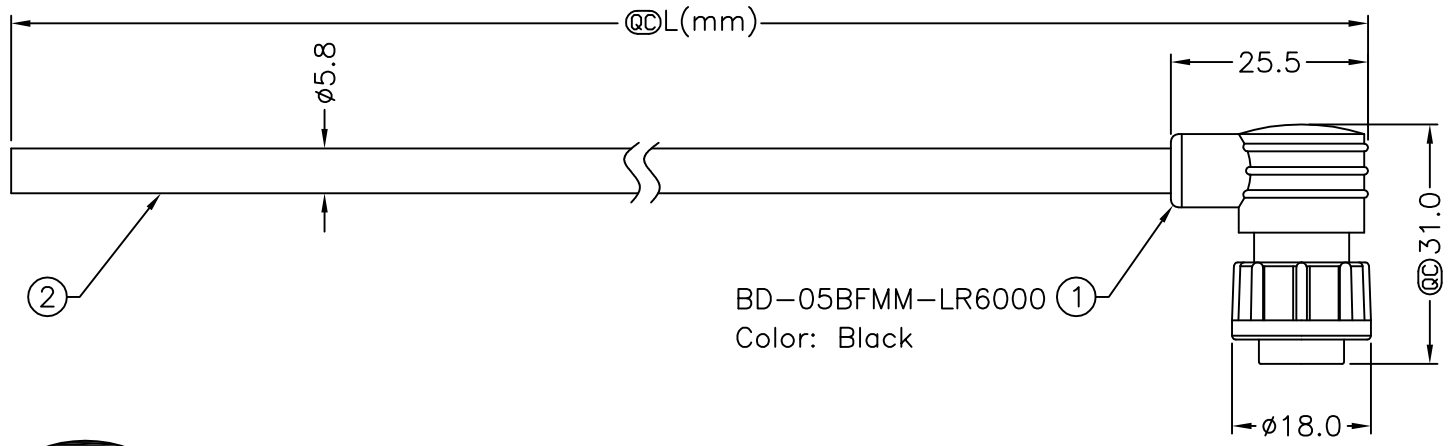


BD-05BFMM-LR6000 (1)
Color: Black

BD-05BFMM-LR6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



Conn.



Pin Assignments
Front View

5	Green
4	White
3	Black
2	Blue
1	Brown
Conn.	Wire Color
Pin Out	

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: Black, UL2464 24AWG*5C+Drain+Al/My
PVC Jacket UV Resistant, OD=5.0mm
 - * Cable Length Tolerance: 1M~10M±5%mm, 11M~99M±500mm.

UNIT:mm		TITLE Standard Cable Lock 5Pin F Conn M Pin	Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Raul Paulo Canja	DATE 2007/01/25
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1		DWG NO BD-05BFMM-LR6AXX	CHECKED BY Ricky Valerio	DATE 2007/01/27
REV. A	SIZE A4	@C :Inspection Item	CUSTOMER ALTW	APPROVED BY Win	DATE 2007/01/27	8 FMWIG02-01-01A2