


1	2	3	4	5	6	7	8
REV.	EGR. NO.	DATE	SIGN	DESCRIPTION			


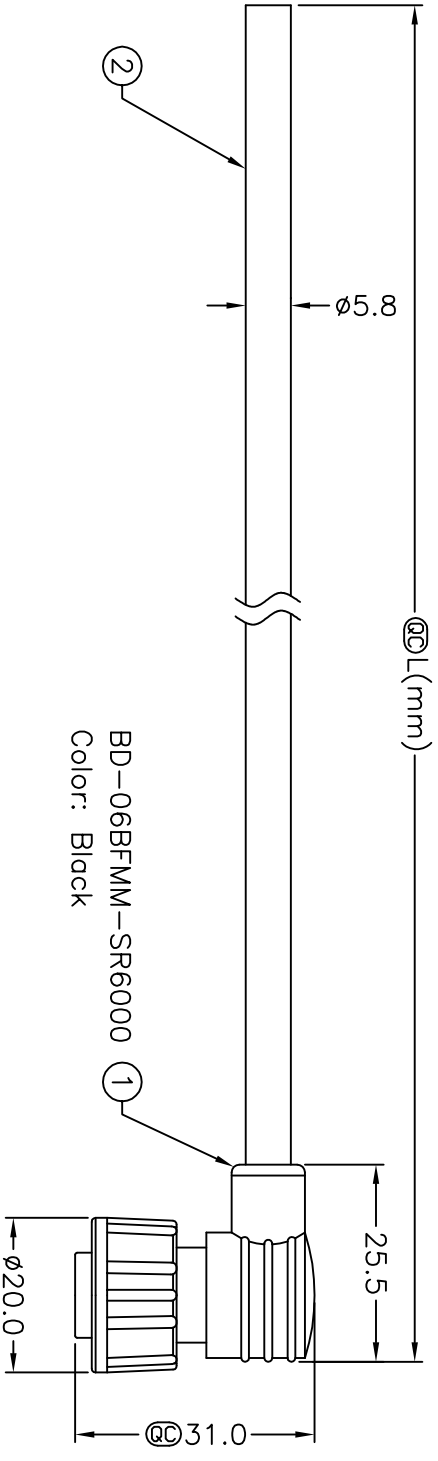


BD-06BFMM-SR6000  
Color: Black


BD-06BFMM-SR6AXX

- XX:01~99Meter
- 01:01Meter
- 02:02Meters
- ...
- 99:99Meters

Cable Length(L):01~99Meters




Conn.



Note:  
 \* @ Important Dimension To Check.  
 \* Waterproof Rate: IP66  
 \* Housing: Black, Nylon+GF  
 \* Pin: Copper Alloy, Gold Plated  
 \* Cable: Black, PVC UL2464 24#\*6C+D+Al/My  
 (UV Resistant) OD=5.8mm  
 \* Cable Length Tolerance: 1M~10M±5%mm, 11M~99M±500mm.

6	White
5	Red
4	Orange
3	Yellow
2	Green
1	Blue
Conn.	Wire Color
	Pin Out



Pin Assignments  
Front View

TITLE	Standard Cable Screw 6Pin F Conn M Pin		
SCALE	Free	SHEET 1	OF 1
REV.	A	SIZE	A4
		@	Inspection Item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	BD-06BFMM-SR6AXX	ALTW	Raul Paulo Cania	Robert Dabu	Win	2007/02/10
						2007/02/12
						2007/02/12