





No.	Item No.	L(mm)	Cut Length(mm)
1	BD-08BFFM-LR6A01	1000±50	1000±10
2	BD-08BFFM-LR6A02	2000±100	2000±15
3	BD-08BFFM-LR6A05	5000±250	5000±20
4	BD-08BFFM-LR6A10	10000±500	10000±30

REV.	ECN NO.	DATE	SIGN	DESCRIPTION

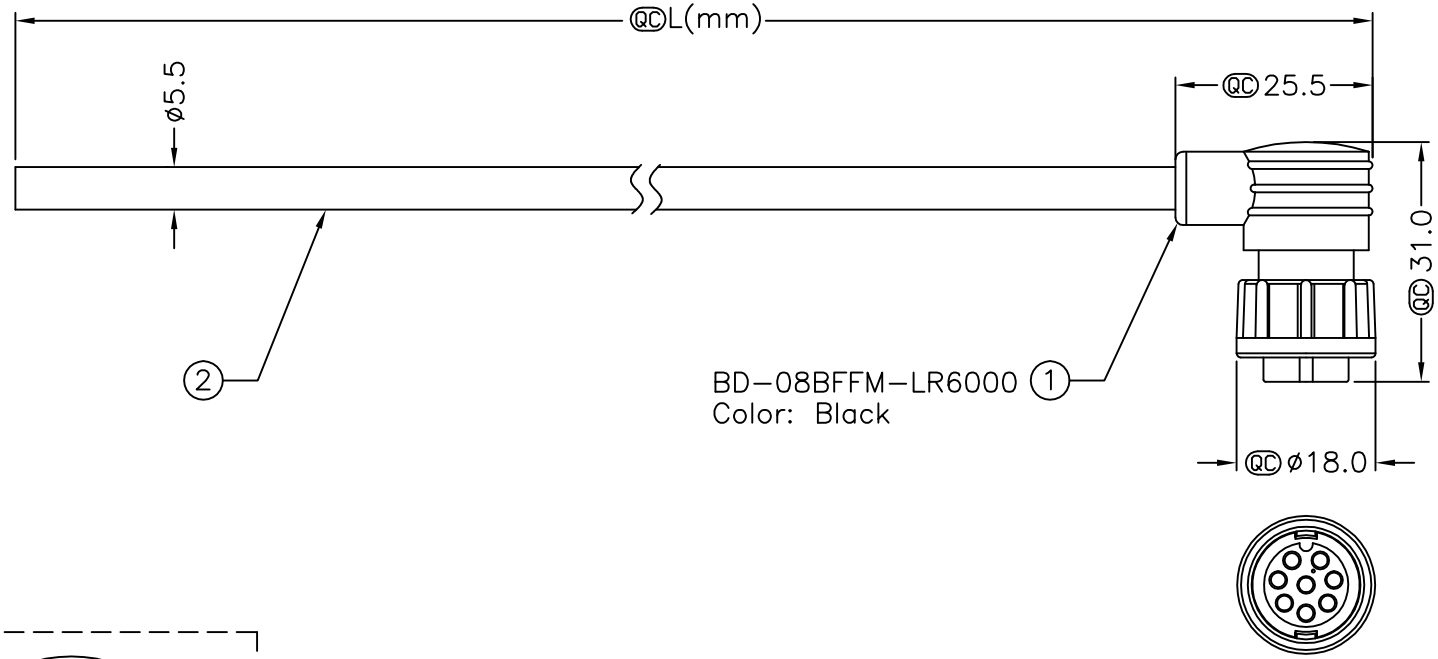

8	Green
7	Yellow
6	Orange
5	Red
4	Blue
3	White
2	Brown
1	Black
Conn.	Wire Color
Pin Out	

Conn.

- Notes:
- * @C Important Dimensions To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF,Black
 - * Female Pin: Copper Alloy,Gold PLated
 - * Cable: UL2464 24AWG*8C+Drain+Al/My Black,PVC Jacket UV Resistant, OD=5.5

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE 8Pin F Conn. F Pin(5A) To Cable	
SCALE Free	SHEET 1 OF 1
REV. A	SIZE A4 @C :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY E.R.Foronda	DATE 2006/04/06
DWG NO BD-08BFFM-LR6AXX	CHECKED BY Ronnel	DATE 2006/04/19
CUSTOMER ALTW	APPROVED BY Win	DATE 2006/04/20

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.