




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1620174~177	2016/01/14	Ruru	Change Logo & Note

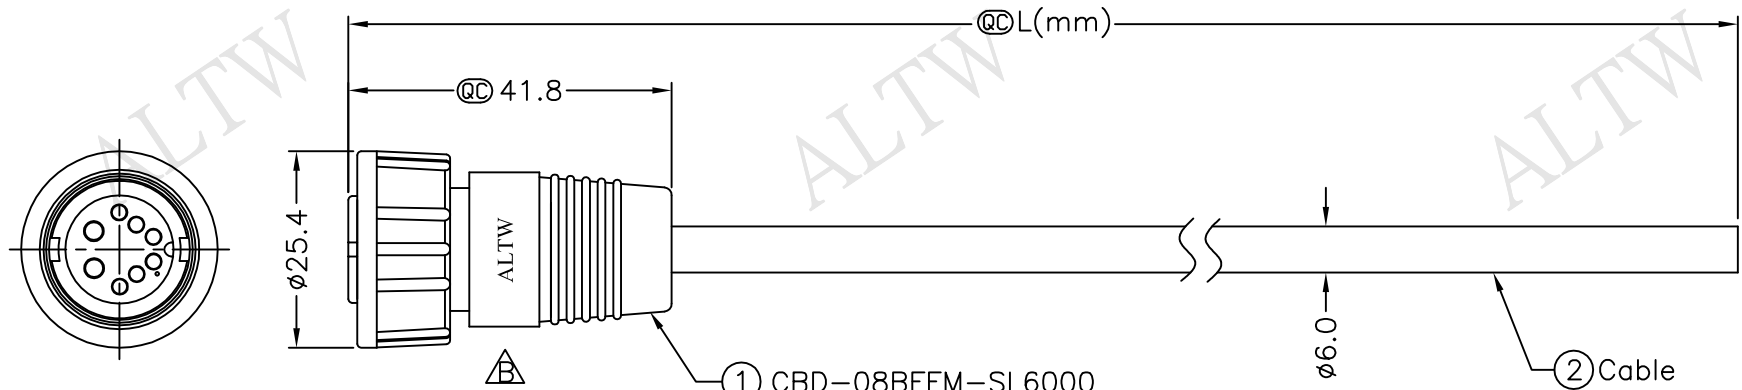

Conn.

CBD-08BFFM-SL6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters

Cable Length(L):01~99Meters



Pin Assignments
Front View

8	Green	20
7	Blue	20
6	Yellow	24
5	Orange	24
4	Red	24
3	Brown	24
2	Black	24
1	Purple	24
Conn.	Wire Color	AWG
	Pin Out	

- Note:
- * QC Important Dimensions To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * O-Ring: EPDM, Black
 - * Nut: Nylon+GF, Black
 - * Cable: UL2464 (20AWG*2C+24AWG*6C)+Drain+Al/My, PVC Jacket UV Resistant(+105°C~-20°C), OD=6.0, Black
 - * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm



UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Middle,Cable Screw 8Pin F Conn F Pin	
SCALE Free	SHEET 1 OF 1
REV. B	SIZE A4
QC :Inspection Item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru
DWG NO CBD-08BFFM-SL6AXX	CHECKED BY Rita
CUSTOMER ALTW	APPROVED BY Lisa

DATE 2016/01/14
DATE 2016/01/14
DATE 2016/01/14

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F
E
D
C
B
A

1 2 3 4 5 6 7 8