

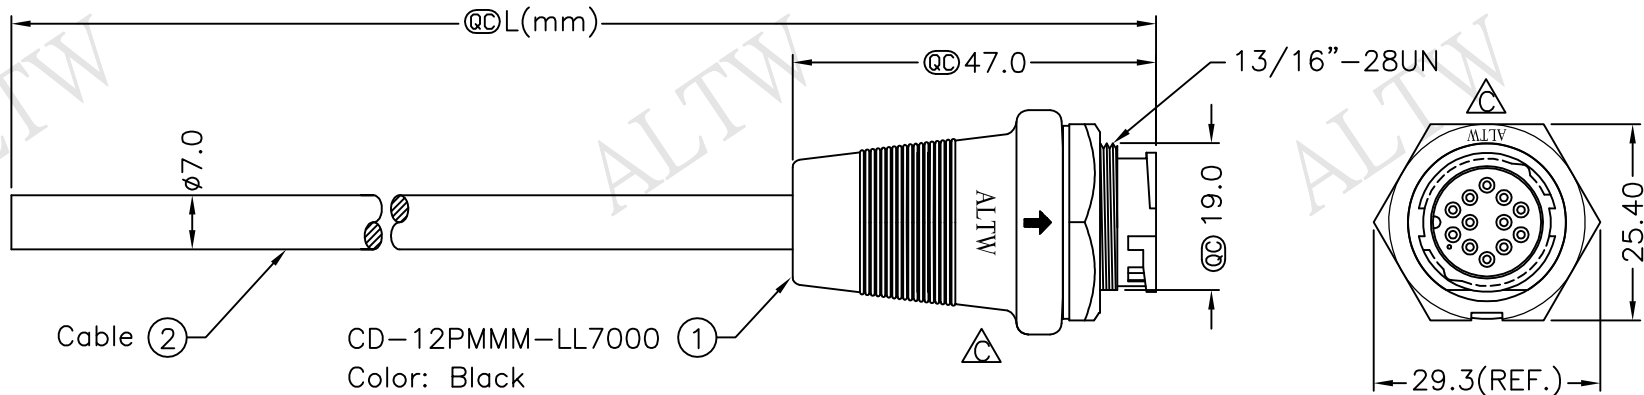



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0079~82	2008/09/25	Shin	Add Note
C	LEN1630536~39	2016/03/17	Ruru	Change Logo & Note

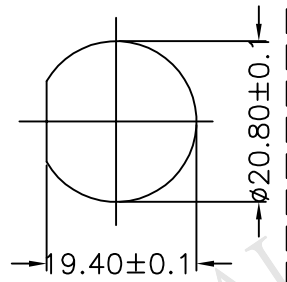


Cable ② CD-12PMMM-LL7000 ①
Color: Black

CD-12PMMM-LL7AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters
 Cable Length(L):01~99Meters



Recommended Panel Cut-Out



Pin Assignments Front View

6	Gray	灰	12	Light Green	淺綠
5	Yellow	黃	11	Purple	紫
4	Green	綠	10	Orange	橘
3	White	白	9	Black	黑
2	Blue	藍	8	Red	紅
1	Brown	棕	7	Pink	粉紅
Conn.	Wire Color	Conn.	Wire Color		

- Note:
- * @C Important Dimensions To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF,Black
 - * Male Pin: Copper Alloy,Gold Plated
 - * Cable: UL2464 24AWG*12C+D+AL/My Black,PVC Jacket UV Resistant, OD=7.0
 - * Use with waterproof cap or dust cap
Panel Thickness Max: 2.0mm
 - * Use without waterproof cap or dust cap
Panel Thickness Max: 3.0mm
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Middle, Cable Lock 12Pin M Conn M Pin	
SCALE Free	SHEET 1 OF 1
REV. C	SIZE A4
QC : Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2016/03/17
DWG NO CD-12PMMM-LL7AXX	CHECKED BY Rita	DATE 2016/03/17
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/03/17

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F
E
D
C
B
A