



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0129~132	2010/11/23	Ivan	Change前導角View
C	LEN15C0531~534	2015/12/16	Ruru	Change Logo

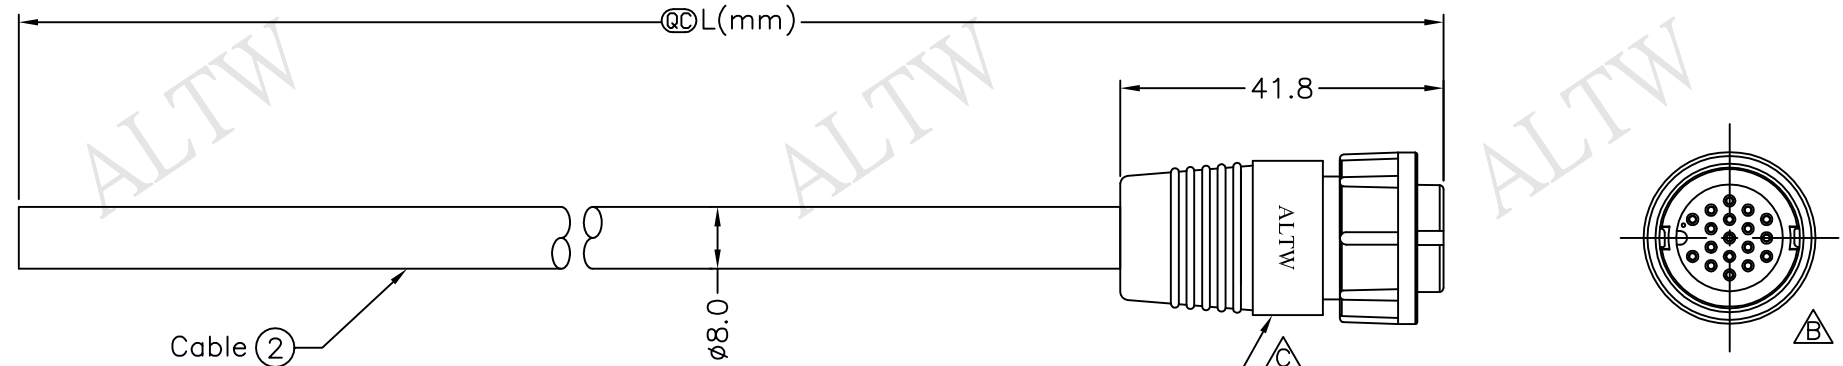


Blue/White	藍/白	18
Light Green	淺綠	17
Green/White	綠/白	16
Brown/White	棕/白	15
Orange/White	橙/白	14
Black/White	黑/白	13
Red/White	紅/白	12
Orange	橙	11
Pink	粉紅	10
Gray	灰	9
Purple	紫	8
Yellow	黃	7
Green	綠	6
White	白	5
Brown	棕	4
Blue	藍	3
Black	黑	2
Red	紅	1
Wire Color		Conn.
Pin Out		

CU-18BFFM-LL6000 ①
Color: Black


CU-18BFFM-LL6AXX
XX:01~99Meters
01:01Meter
02:02Meters
⋮
99:99Meters
Cable Length(L):01~99Meters



- Note:
- * @C Important Dimension.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * O-Ring: EPDM, Black
 - * Lock Nut: Nylon+GF, Black
 - * Cable: UL2464 24AWG*18C+Drain+AL/My PVC Jacket, UV Resistant, OD=8.0mm, Black
 - * Cable Length Tolerance:
 - 01M:±40mm
 - 02M~05M:±60mm
 - 06M~10M:±100mm
 - 11M~30M:±200mm
 - 31M~99M:±500mm



Pin Assignments Front View



UNIT:mm		TITLE	Middle	Amphenol LTW	ITEM NO	DRAWN BY	Ruru	DATE	2015/12/16
TOLERANCE	±0.5mm		Cable Lock 18Pin F Conn F Pin	安費諾亮泰企業股份有限公司	DWG NO	CHECKED BY	Rita	DATE	2015/12/16
		SCALE	Free		CUSTOMER	APPROVED BY	Lisa	DATE	2015/12/16
		REV.	C						
		SIZE	A4						
			@C :Inspection Item						
1	2	3	4	5	6	7	8	FMW0702-01-01A2	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.