




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1380262~265	2013/08/20	Ruru	Change Logo & Modify Note
C	C200914	2020/06/16	Ruru	△X3

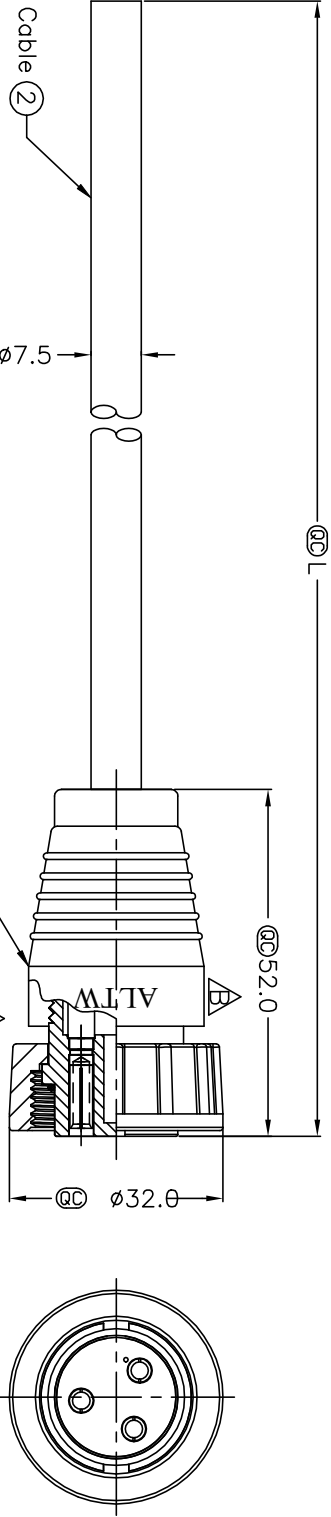

DC-03BFFM-SL6AXX

XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters
 Cable Length(L):01~99 Meter



Black	黑	3
Blue	藍	2
Brown	棕	1
Wire Color		Conn.
Pin Out		

- △ Note:
- * @Important Dimension.
 - * Waterproof Rate: IP66
 - * Housing: Thermoplastic, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * O-Ring: Rubber, Black
 - * Screw Nut: Thermoplastic, Black
 - * Cable: UL2464 16AWG*3C+D+AL/My
 - * UV Resistant OD=7.5mm, Black
- △ Cable Length Tolerance: 01M:40mm
 02M~05M:60mm
 06M~10M:100mm
 11M~30M:200mm
 31M~99M:500mm

UNIT:mm		TITLE	0 CERES, D-20A, 03P, CABLE W/O SR
TOLERANCE	±0.5 mm	SCALE	1 : 1
REV.	C	SIZE	A4
		SHEET	1 OF 1
		①	inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DC-03BFFM-SL6AXX	DRAWN BY	Ruru	DATE	2013/08/20
DWG NO	DC-03BFFM-SL6AXX	CHECKED BY	Vicky	DATE	2013/08/20
CUSTOMER	ALTW	APPROVED BY	Rita	DATE	2013/08/20