
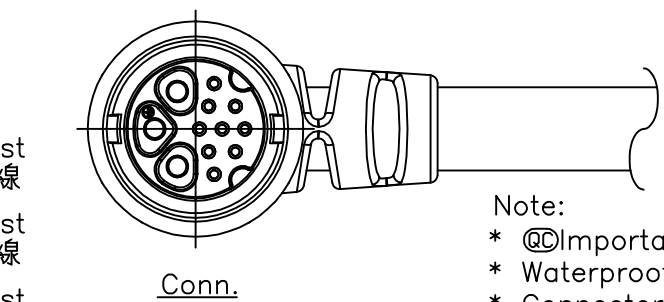


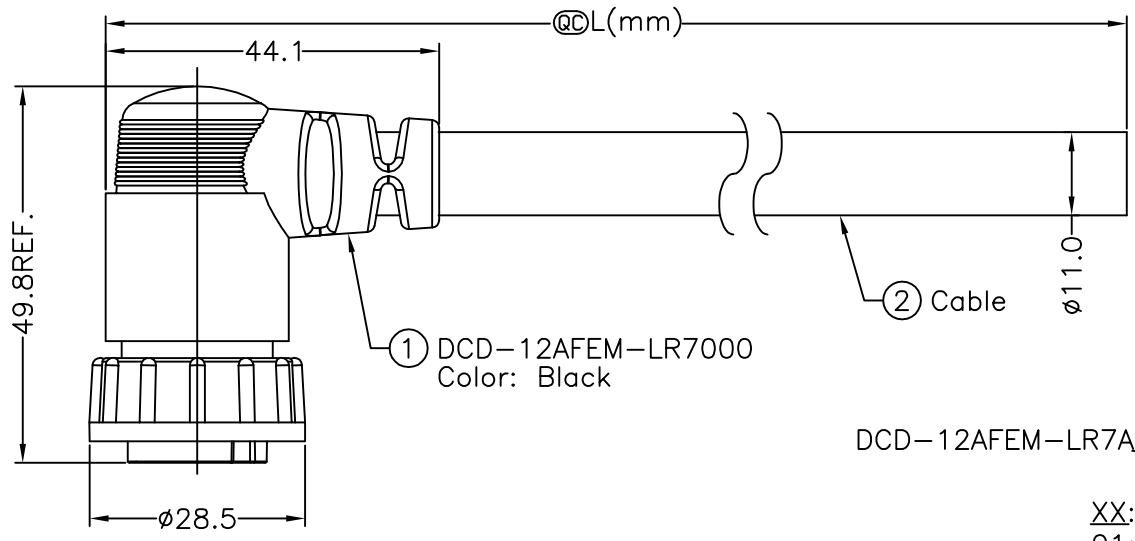


5	6	7	8
REV. A	ECN NO. LTD-000003336	DATE 2010/12/01	SIGN Ann DESCRIPTION NEW ITEM

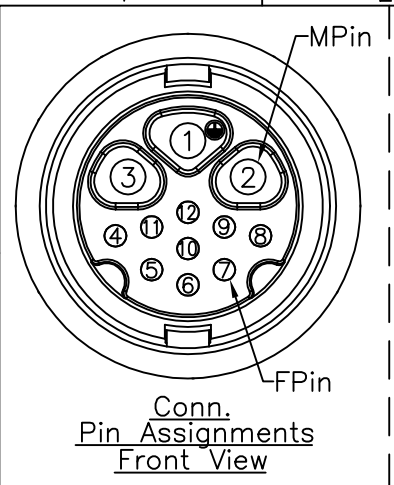

DCD-12AFEM-LR7AXX

XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters

Cable Length(L):01~99Meters

12	Drain	地線	(24AWG)	Twist 對線
11	Brown	棕	(24AWG)	
10	Black	黑	(24AWG)	Twist 對線
9	Gray	灰	(24AWG)	
8	Blue	藍	(24AWG)	Twist 對線
7	Green	綠	(24AWG)	
6	Yellow	黃	(24AWG)	Twist 對線
5	White	白	(24AWG)	
4	Red	紅	(24AWG)	Twist 對線
3	Blue	藍	(16AWG)	
2	Brown	棕	(16AWG)	Twist 對線
1	Green/Yellow	綠/黃	(16AWG)	
Conn.	Wire Color			
Pin Out				

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Connector: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 (24AWG*4P+D+AL/MY)+16AWG*3C+F+P, Black, PVC Jacket, UV Resistant, OD=11.0mm.
 - * Cable Length Tolerance: 01M±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

UNIT:mm		TITLE Cable Connector 90° FConn 3MPin(20A)+9FPin(5A)	Amphenol LTW	ITEM NO	DRAWN BY Enoch	DATE 2009/12/30
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1	安費諾亮泰企業股份有限公司	DWG NO DCD-12AFEM-LR7AXX	CHECKED BY Jimmy	DATE 2009/12/30
	REV. A	SIZE A4	@C :Inspection Item	CUSTOMER ALTW	APPROVED BY Win	DATE 2009/12/30

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.