
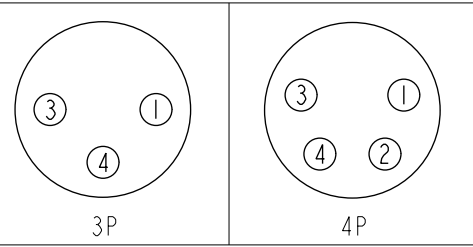
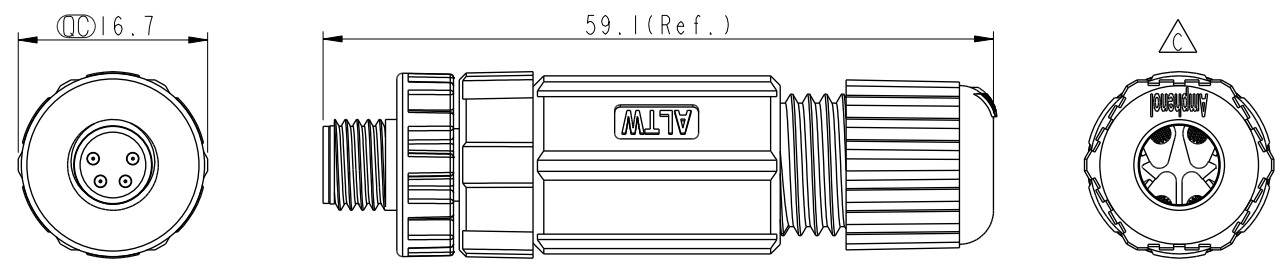


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LENI480615	2014/08/12	Rita	Update Logo
D	LENI760035	2017/05/31	Ruru	Change Logo
E	C210686	2021/05/07	Vicky	△E X5

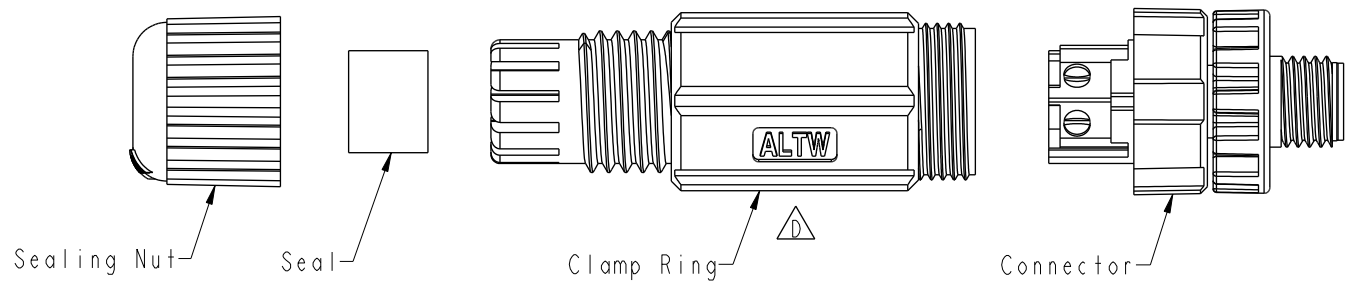

△E Pin Assignments Front View

△E
8P-XXBMMB-SL7001
XX: No. Of Pin

- △E Note:
- * RoHS Compliant
 - * ∅ Important Dimension
 - * Waterproof rate: IPX7, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Extension Nut: Thermoplastic, Black
 - Nut: Thermoplastic, Black
 - O-Ring: Rubber, Black
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - △B * Seal: Rubber, Black, OD:∅4.5mm-∅6.5mm
 - * One set unassembled in one pe bag

UNIT:mm		TITLE O SEN, M8 PLASTIC CABLE W/O SR, M, M, FI SCREW IN	△E
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 2:1 SIZE A4 SHEET 1 OF 1 REV. E WC-REV. B.1	∅: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2017-05-31
DWG NO △E 8P-XXBMMB-SL7001	CHECKED BY	DATE
	Rita	2017-05-31
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2017-05-31