



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201735	2020/11/10	Ruru	$\triangle B$ X5
C	C210226	2021/03/30	Vicky	$\triangle C$ X4

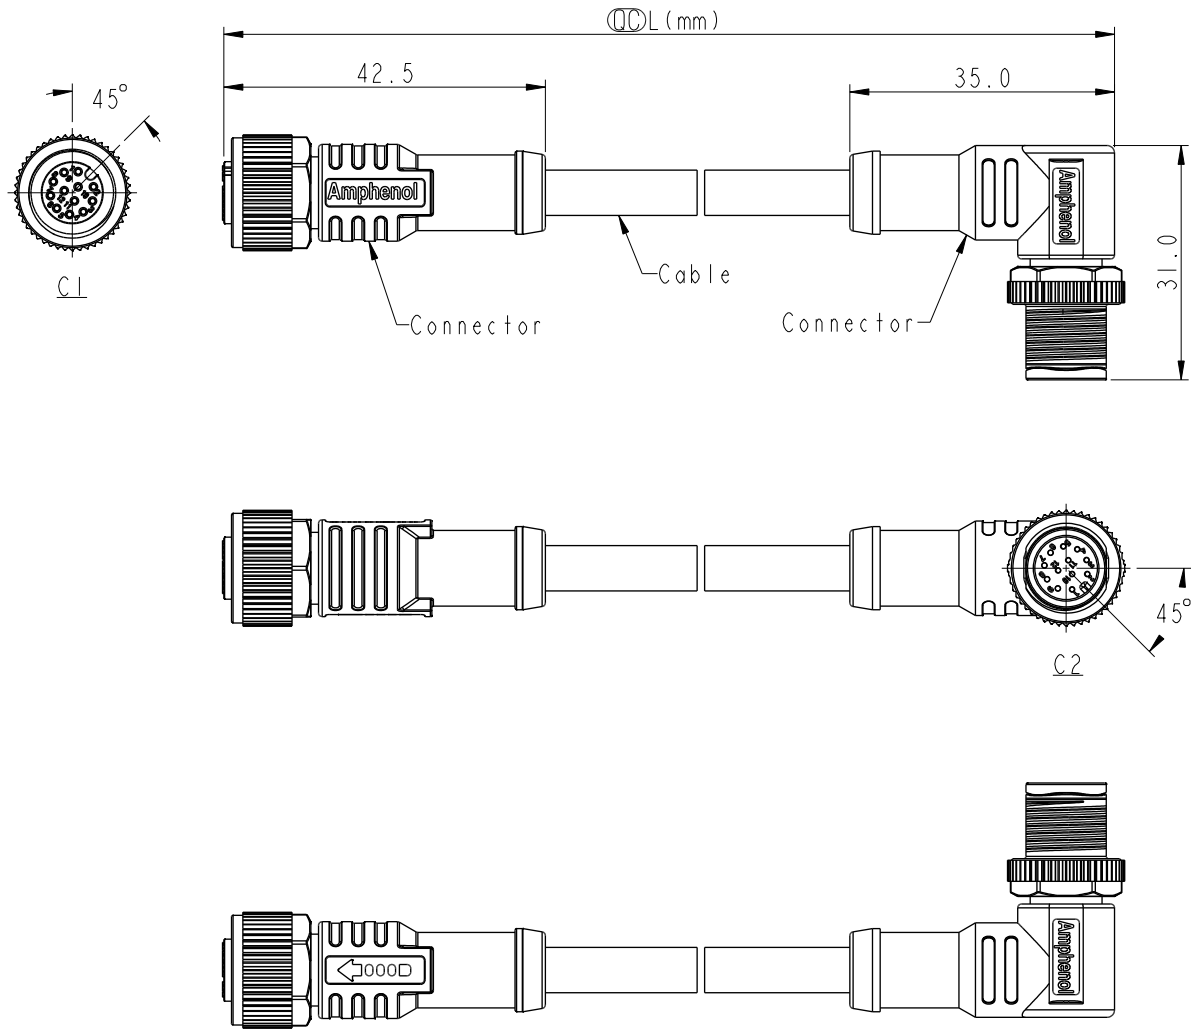

Note:

- * RoHS Compliant
- * \circledast Important dimension
- * C1
Waterproof rate: IPX8, mated 1m/24h
IPX9K, mated
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
O-Ring: Rubber, Green
Nut: Metal
Outer Mold: Thermoplastic, Black
- * C2
Waterproof rate: IPX8, mated 1m/24h
IPX9K, mated
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
Nut: Metal
Outer Mold: Thermoplastic, Black
- * Cable: UL2517, PVC Jacket, Black
- * Cable Length Tolerance:

0.5M < L ≤ 1M:	+60/-0 mm
1M < L ≤ 3M:	+120/-0 mm
3M < L ≤ 5M:	+160/-0 mm
5M < L ≤ 10M:	±100 mm
10M < L ≤ 20M:	±200 mm
20M < L ≤ 30M:	±300 mm
30M < L ≤ 99M:	±500 mm

UNIT: mm		TITLE	ACC, SEN, A Code, DB-ENDED $\triangle C$
TOLERANCE	±0.5mm	SCALE	1:2
		SIZE	A4
		SHEET	1 OF 2
		REV.	C
		WC-REV.	
		\circledast	Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2018-12-06
DWG NO	CHECKED BY	DATE
$\triangle A$ M12AXXFL-12AMR-SDXXX	Rita	2018-12-06
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2018-12-06

