
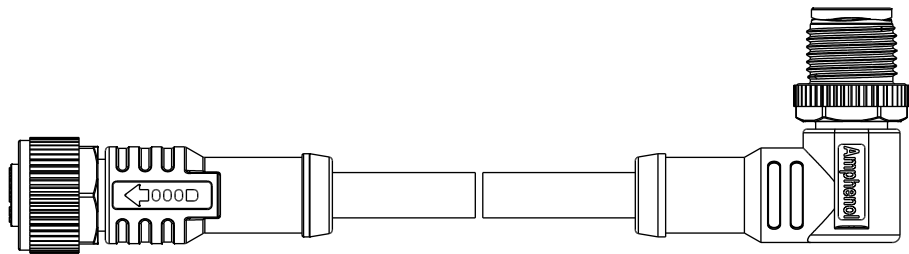
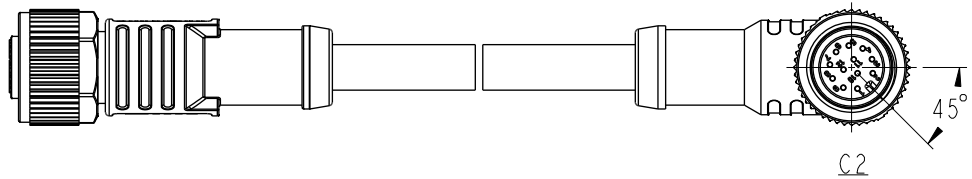


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201748	2020/11/10	Ruru	$\triangle B$ X5
C	C210230	2021/04/01	Vicky	$\triangle C$ X4

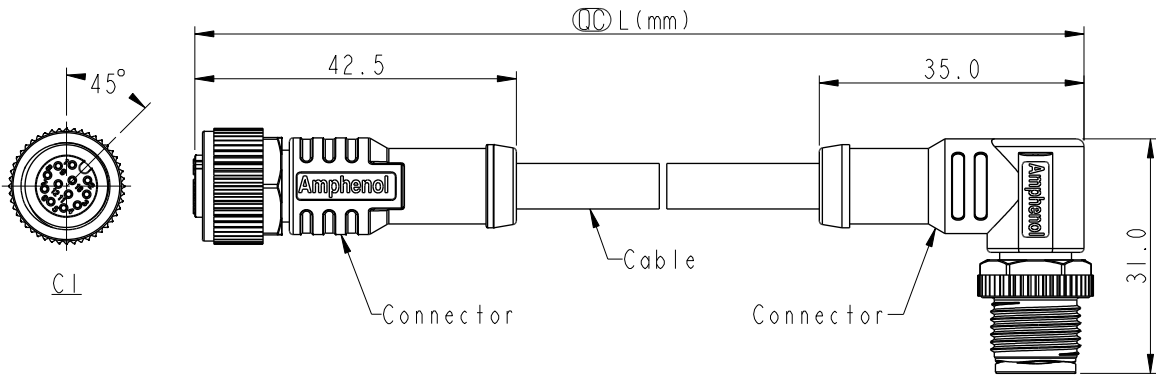

Note:

- * RoHS Compliant
- * \circ Important dimension
- * C1
Waterproof rate: IPX8, mated 1m/24h
IPX9K, mated
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
O-Ring: Rubber, Green
Nut: Thermoplastic, Black
Outer Mold: Thermoplastic, Black
- * C2
Waterproof rate: IPX8, mated 1m/24h
IPX9K, mated
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
Nut: Thermoplastic, Black
Outer Mold: Thermoplastic, Black
- * Cable: UL20549, PUR Jacket, Black
- * Cable Length Tolerance:

0.5M < L \leq 1M:	+60/-0 mm
1M < L \leq 3M:	+120/-0 mm
3M < L \leq 5M:	+160/-0 mm
5M < L \leq 10M:	\pm 100 mm
10M < L \leq 20M:	\pm 200 mm
20M < L \leq 30M:	\pm 300 mm
30M < L \leq 99M:	\pm 500 mm

UNIT: mm		TITLE	ACC, SEN, A Code, DB-ENDED $\triangle C$
TOLERANCE	± 0.5 mm	SCALE	1:2
		SIZE	A4
		SHEET	1 OF 2
		REV.	C
		WC-REV.	
		\circ Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2018-12-06
DWG NO	CHECKED BY	DATE
$\triangle B$ MSAPXXFL-SAPMR-SBXXX	Rita	2018-12-06
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2018-12-06

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

