




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2019/01/24	Brady	New Initial
B	C201786	2020/11/18	Ruru	$\triangle B$ X3
C	C210237	2021/03/30	Ruru	$\triangle C$ X2




C1

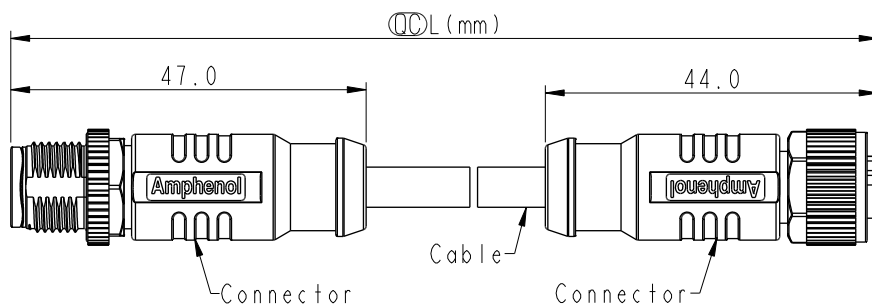

C2

Pin Out	Shield	Wire
5	--	
4	Black	黑
3	Blue	藍
2	White	白
1	Brown	棕

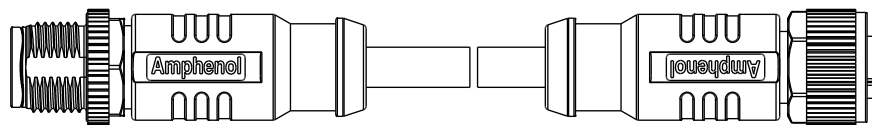

Note: $\triangle B$ $\triangle C$

- * RoHS Compliant
- * ϕ Important dimension
- * C1

Waterproof rate: IPX8, mated 1m/24h
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 Nut: Metal
 Shield: Metal
 Outer mold: Thermoplastic, Black



* C2

Waterproof rate: IPX8, mated 1m/24h
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 O-Ring: Rubber, Gray
 Nut: Metal
 Shield: Metal
 Outer mold: Thermoplastic, Black

* Cable: UL2517, Shield, 22#*4C+AL/MY+B, OD=5.3mm, PVC Jacket, Black

* Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
 1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 99M: ±500 mm

$\triangle B$
 MSDSXXML-SDSFL-SDXXX
 XX: No. Of Pin
 XXX: 0.5~99Meters
 A05: 0.5 Meter
 1: 01 Meter
 2: 02 Meters
 :
 99: 99 Meters

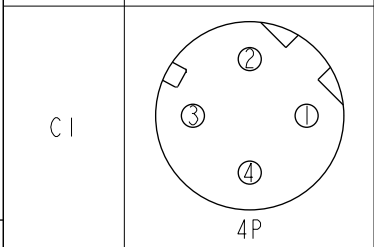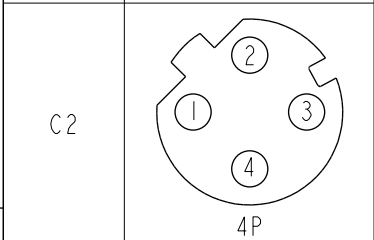

Pin Assignments Front View

UNIT:mm	
TOLERANCE	± 0.5mm

TITLE ACC, SEN, D Code, DB-ENDED MF $\triangle C$			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. A	ϕ Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Brady	DATE 2019/01/24
DWG NO $\triangle B$ MSDSXXML-SDSFL-SDXXX	CHECKED BY Eagle	DATE 2019/01/24
CUSTOMER ALTW	APPROVED BY Neo	DATE 2019/01/24

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.