


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2019/01/24	Brady	New Initial
B	C201786	2020/11/18	Ruru	$\triangle B$ X3
C	C210237	2021/03/30	Ruru	$\triangle C$ X2

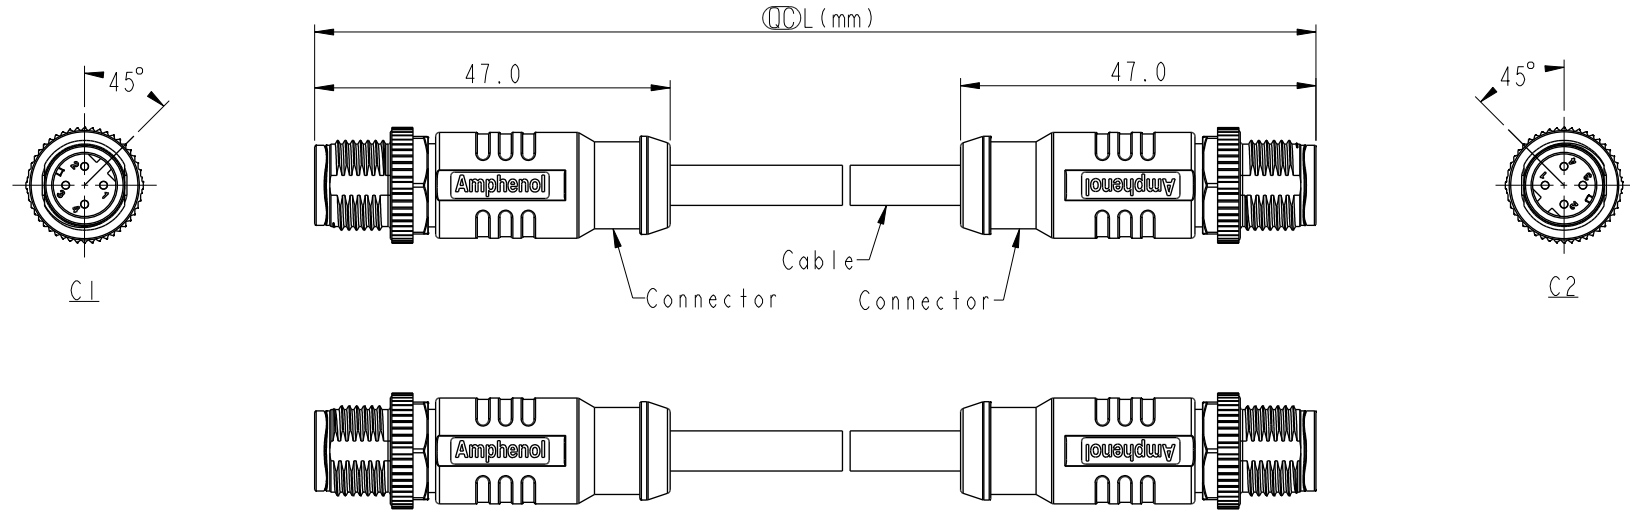

Pin Out	5	Shield	
	4	Black	黑
	3	Blue	藍
	2	White	白
	1	Brown	棕
Pin #	Wire		
C1 & C2			
	4P		

$\triangle B$ MSDSXXML-SDSML-SDXXX
 XX: No. Of Pin
 XXX: 0.5~99Meters
 A05: 0.5 Meter
 1: 01 Meter
 2: 02 Meters
 :
 99: 99 Meters

Note: $\triangle B \triangle C$

- * RoHS Compliant
- * \varnothing Important dimension
- * Waterproof rate: IPX8, mated 1m/24h
- * Connector:
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Nut: Metal
 - Shield: Metal
 - Outer mold: Thermoplastic, Black
- * Cable: UL2517, Shield, 22#*4C+AL/MY+B, OD=5.3mm, PVC Jacket, Black
- * Cable length tolerance:
 - 0.5M < L ≤ 1M: +60/-0 mm
 - 1M < L ≤ 3M: +120/-0 mm
 - 3M < L ≤ 5M: +160/-0 mm
 - 5M < L ≤ 10M: ±100 mm
 - 10M < L ≤ 20M: ±200 mm
 - 20M < L ≤ 30M: ±300 mm
 - 30M < L ≤ 99M: ±500 mm

UNIT:mm		TITLE	ACC, SEN, D Code, DB-ENDED MM	
TOLERANCE	± 0.5mm	SCALE	1:1	SIZE A4
		REV.	C	WC-REV. A
			\varnothing : Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Brady	2019/01/24
DWG NO	CHECKED BY	DATE
$\triangle B$ MSDSXXML-SDSML-SDXXX	Eagle	2019/01/24
CUSTOMER	APPROVED BY	DATE
ALTW	Neo	2019/01/24