



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C201762	2020-11-11	Allen Pan	$\triangle C$ x3
D	C201786	2020-11-17	Ruru	$\triangle D$ x3
E	C210237	2021-03-30	Ruru	$\triangle E$ x1

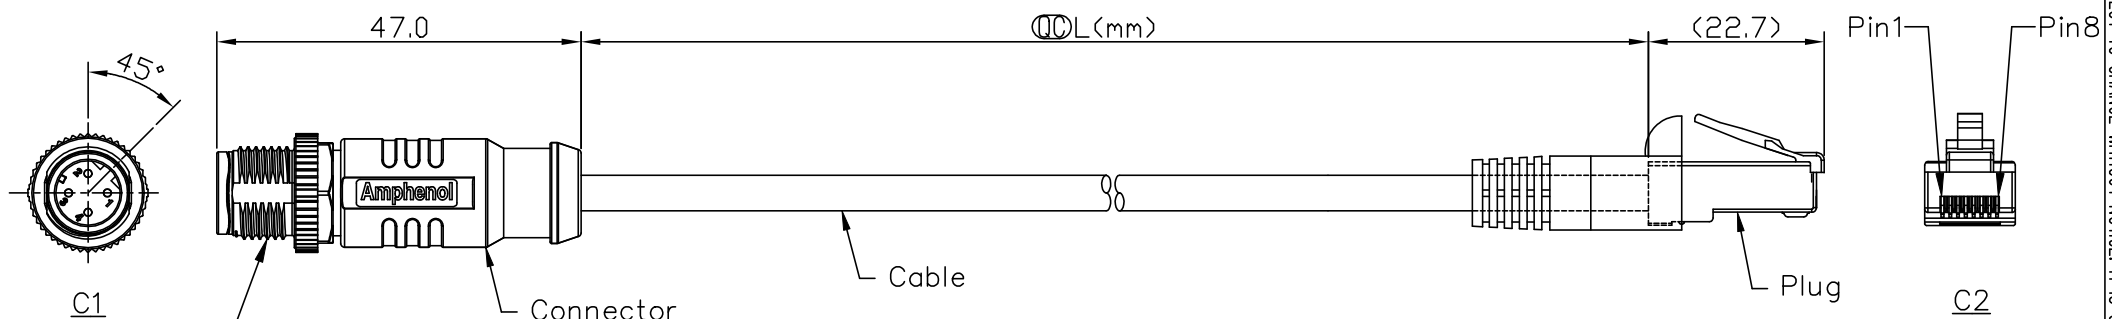

MSDSXXML-SPBML-SEXXX
 XX: No. Of Pin
 XXX: 0.5~40Meters
 A05: 0.5Meter
 001: 01Meter
 002: 02Meters
 ...
 040: 40Meters

- Note: $\triangle B \triangle C \triangle D \triangle E$
- * RoHS Compliant
 - * \textcircled{L} Important dimension
 - * C1
 Waterproof rate: IPX8, mated 1m/24h
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 Nut: Metal
 Shield: Metal
 Outer mold: Thermoplastic, Black
 - * C2
 Waterproof rate: Non-Waterproof
 Plug: RJ45, Shielded
 - * Cable: CAT-5E, FTP, 22#*2P+AI/MY+D, OD=6.2mm, PU Jacket, Black
 - * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
 1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 40M: ±500 mm

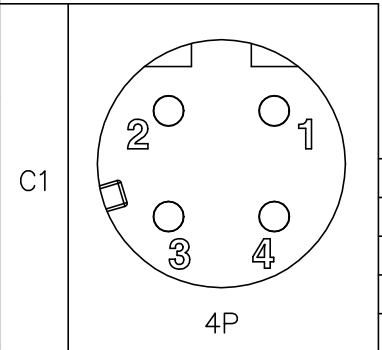

Shield	Drain	地線	Shield	
4	Green	綠	6	Twist
2	White/Green	白/綠	3	
3	Orange	橘	2	Twist
1	White/Orange	白/橘	1	
C1	Wire Color		C2	
Pin Assignments Front View				
Pin Out				

UNIT: mm	TOLERANCE	SCALE	SHEET	Amphenol LTW		ITEM NO	DRAWN BY	DATE
±0.5 mm	Free	1 OF 1	1	安費諾亮泰企業股份有限公司		$\triangle D$ MSDSXXML-SPBML-SEXXX	Allen Pan	2020-05-11
REV. E	SIZE A4	©: Inspection Item				CUSTOMER	CHECKED BY	DATE
						ALTW	Sam Ho	2020-05-11
							APPROVED BY	DATE
							Fred Lee	2020-05-11

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.