



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	initial release	2021/10/13	Li Dai	Rev.01 to Rev.A

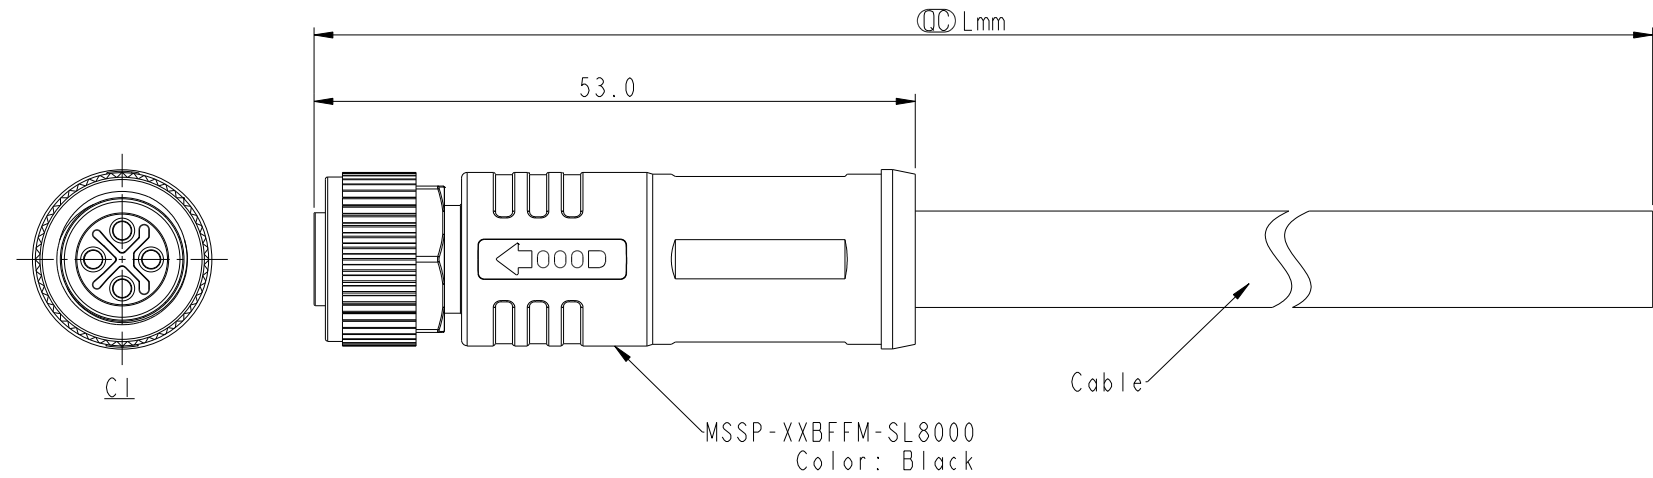

PE Yellow/Green	黄/绿	PE Yellow/Green	黄/绿
3 Blue	蓝	3 Blue	蓝
2 --		2 White	白
1 Brown	棕	1 Brown	棕
Pin#	Wire	Pin#	Wire

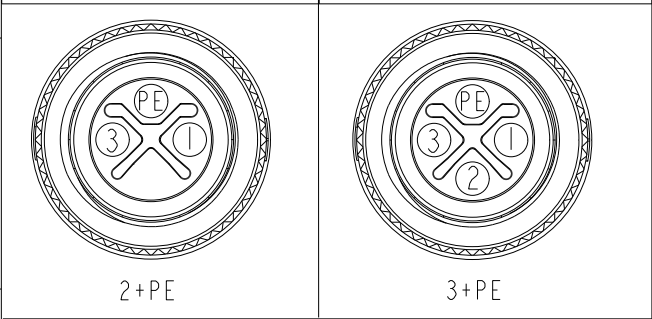

Pin Assignments Front View

MSSP-XXBFFM-SL8GXX
 XX: 01~99Meters
 01: 01Meter
 :
 99: 99Meters
 XX: Number of Pin

- Note:
- * RoHS Compliant
 - * \varnothing Important Dimension to Check
 - * Waterproof Rate: IPX8, Mated 1m/24h
 - * Connector:
 - Housing: Thermoplastic, Black
 - Pin: Copper Alloy, Gold Plated
 - Screw Nut: Thermoplastic, Black
 - Outer Mold: Thermoplastic, Black
 - * Cable: UL2586, 16AWG, PVC Jacket, Black
 - * Cable Length Tolerance: 01M: +50/-0mm
 - 1M < L ≤ 3M: +100/-0 mm
 - 3M < L ≤ 5M: +150/-0 mm
 - 5M < L ≤ 10M: ±100 mm
 - 10M < L ≤ 20M: ±200 mm
 - 20M < L ≤ 30M: ±300 mm
 - 30M < L ≤ 99M: ±500 mm

UNIT:mm		TITLE
TOLERANCE	$\pm 0.5mm$	M12 S-CODE, STRAIGHT, FEMALE CONN +CABLE, Plastic Screw nut
SCALE	3:2	SIZE
REV.	A	WC-REV.
		.0
		\varnothing : Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Li Dai	2021-10-13
DWG NO	CHECKED BY	DATE
MSSP-XXBFFM-SL8GXX	Fisher Wang	2021-10-13
CUSTOMER	APPROVED BY	DATE
ALTW	Max Yang	2021-10-13