
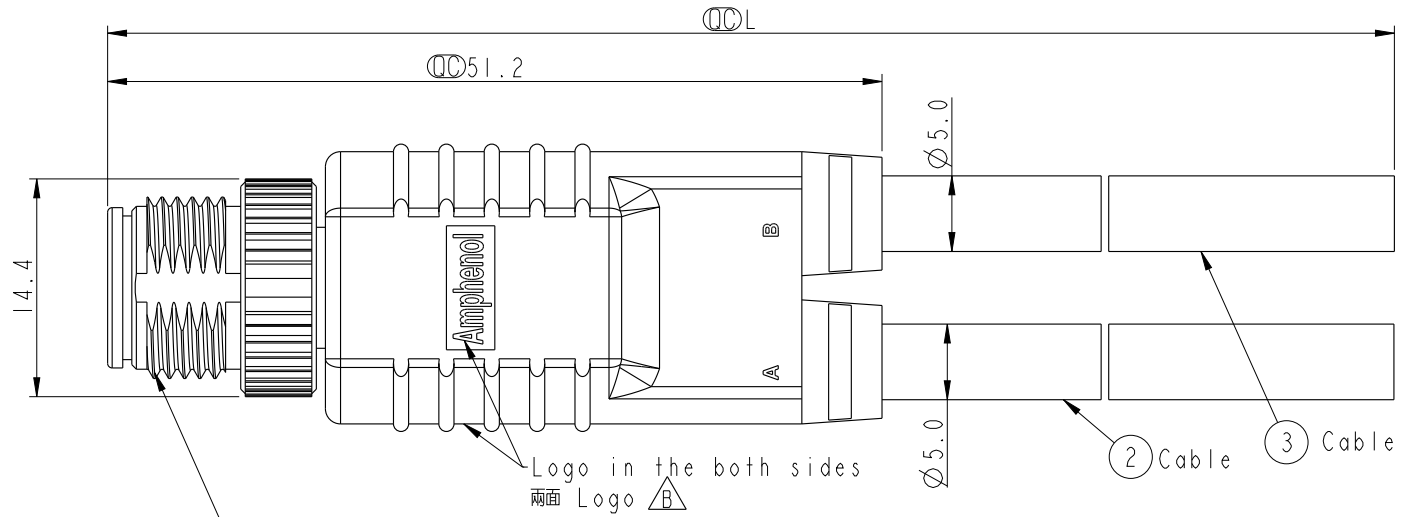



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN13B0165~68	2013/08/10	Cary	Change Logo To Amphenol



① SB-050000-K00-YS000
Color: Black


SD-050000-K00-YSBXX

XX:01~99Meter
01:01Meter
02:02Meters
...
99:99Meters
Cable Length(L):01~99Meters

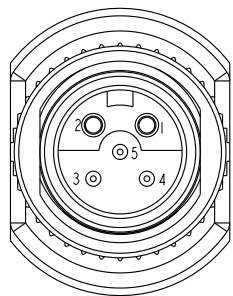

Pin Assignments
Front View

5	Green	綠	Green
4	Black	黑	Black
3	Blue	藍	Blue
2	White	白	White
1	Brown	棕	Brown
	A		B
Conn.	Wire Color		
	Pin Out		



Note:

- * \varnothing Important Dimension.
- $\triangle B$ * Waterproof Rate: IP68
IP68: 1M Depth Of Water In 24hours.
- * Housing: PU, Black
- * Pin: Copper Alloy, Gold Plated
- * Cable: NO HALOGEN 22AWG*5C+T,
Black, PU Jacket, UV Resistant, OD=5.0mm
- $\triangle B$ * Cable Length Tolerance: 01M: ± 40 mm
02M~05M: ± 60 mm
06M~10M: ± 100 mm
11M~30M: ± 200 mm
31M~99M: ± 500 mm

UNIT:mm
TOLERANCE ± 0.5 mm

TITLE M12 I Style Cable Screw 5Pin M Conn. C Pin			
SCALE 2:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.1	\varnothing : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Cary_liu	DATE 2013-08-10
DWG NO SI-050000-K00-YSBXX	CHECKED BY Mafei	DATE 2013-08-10
CUSTOMER ALTW	APPROVED BY Victor	DATE 2013-08-10

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.