






REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1720289~292	2017/02/14	Ruru	Change Logo & Outer Mold Design & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

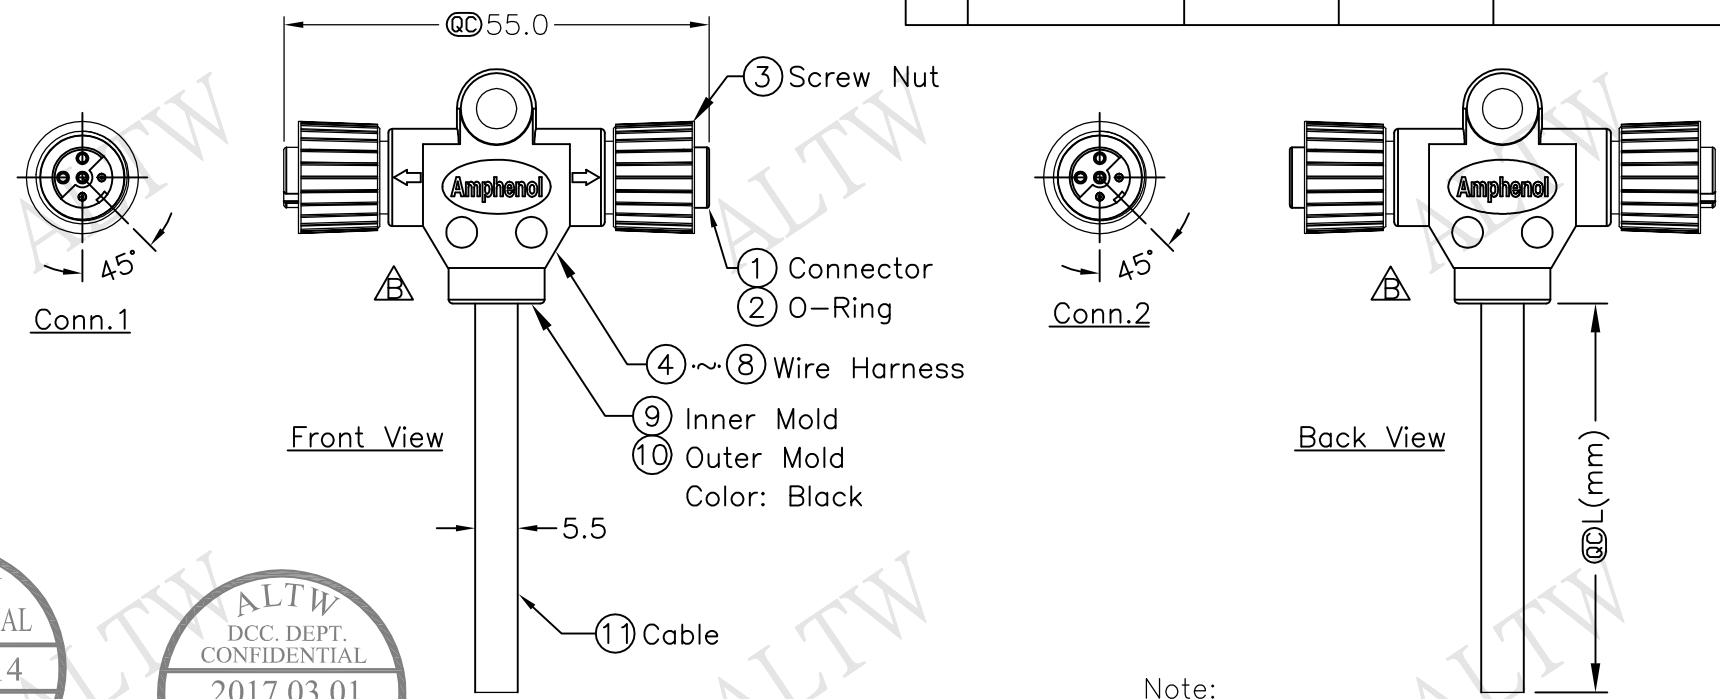

Pin Assignments
Front View

5	Green	綠	5
4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2
Pin Out			

SI-050500-ZZ0-TSAXX

↑
XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension.
 - * Waterproof Rate: IP67
 - * Housing: Black, Polyurethane
 - * Screw Nut: Zinc Alloy, Nickel Plated
 - * Female Pin: Copper Alloy, Gold Plated
 - * O-Ring: Green, Viton
 - * Wire Harness: UL1007 24AWG,(5Pcs.)
 - * Cable: Black,UL2464 22AWG*5C+Talc PVC Jacket UV Resistant OD=5.5mm
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm	
TOLERANCE	
±0.5 mm	

TITLE M12 Conn T Cable Screw FF Conn C Pin			
SCALE	Free	SHEET	1 OF 1
REV.	B	SIZE	A4
@C :Inspection Item			

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2017/02/14
DWG NO SI-050500-ZZ0-TSAXX	CHECKED BY Rita	DATE 2017/02/14
CUSTOMER ALTW	APPROVED BY Max	DATE 2017/02/14