
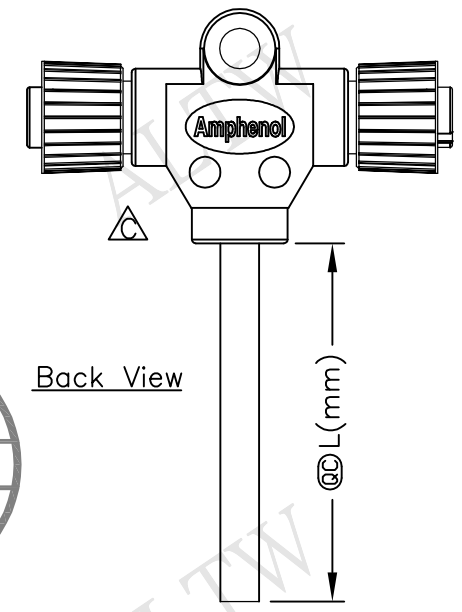



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-880370~373	2008/03/06	Gao Ling	Add Cross
C	LEN1720293~296	2017/02/14	Ruru	Change Logo & Outer Mold Design & Note


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

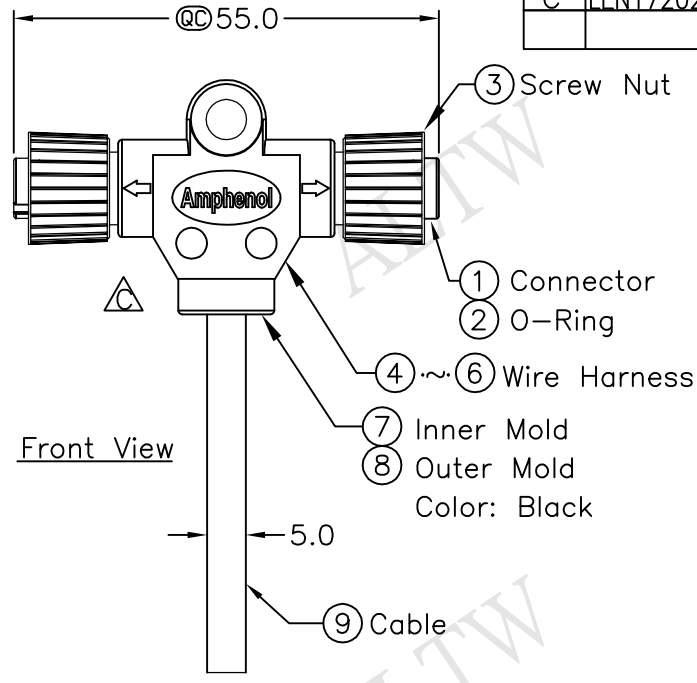

SS-030300-FF0-TSAXX

XX:01~99Meter
01:01Meter
02:02Meters
 ⋮
 ⋮
99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * QC Important Dimension.
 - * Waterproof Rate: IP68
 - * Housing: Black, PU
 - * Female Pin: Copper Alloy, Gold Plated
 - * Wire Harness: UL1007 24AWG, 3Pcs.
 - * Cable: UL2464 22AWG*3C+Talc Black, PVC Jacket UV Resistant OD=5.0mm
 - * Cable Length Tolerance: 01M: ± 40 mm
 02M~05M: ± 60 mm
 06M~10M: ± 100 mm
 11M~30M: ± 200 mm
 31M~99M: ± 500 mm

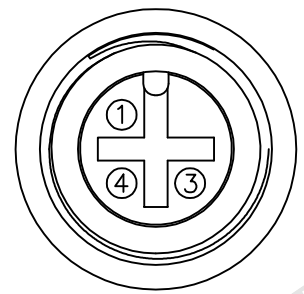

Conn.1 & Conn.2
 Pin Assignments
 Front View

4	Black	黑	4
3	Blue	藍	3
1	Brown	棕	1
Conn.1	Wire Color		Conn.2
Pin Out			

UNIT:mm		TITLE
TOLERANCE	± 0.5 mm	M12 Conn T Cable Screw FF Conn FF Pin
SCALE	Free	SHEET 1 OF 1
REV.	C	SIZE A4
		QC :Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	SS-030300-FF0-TSAXX	DRAWN BY	Ruru	DATE	2017/02/14
DWG NO	SS-030300-FF0-TSAXX	CHECKED BY	Rita	DATE	2017/02/14
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2017/02/14