


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1530101-105	2015/02/10	Ruru	Change Logo
C	LEN1681372-376	2016/08/05	Joyy	Modify The SR & Wire Color
D	CI91688	2019/09/24	Nan_Su	Change Note

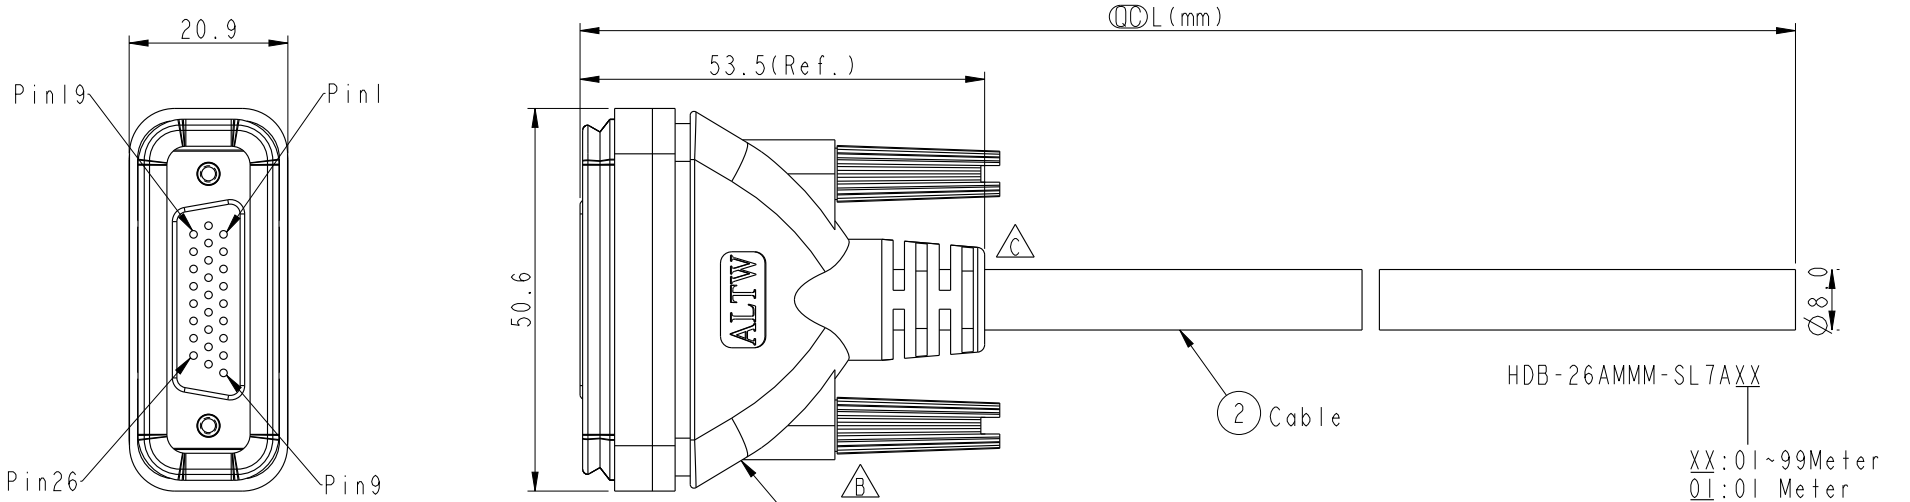

Shell	Drain	地線	Pin	Wire Color
13	Black/White	黑/白	26	Gray/Black 灰/黑
12	Light Green	淺綠	25	Green/Black 綠/黑
11	Purple	紫	24	Yellow/Black 黃/黑
10	Orange	橘	23	Pink/Red 粉紅/紅
9	Black	黑	22	Pink/Black 粉紅/黑
8	Red	紅	21	Orange/Black 橘/黑
7	Pink	粉紅	20	Red/Black 紅/黑
6	Gray	灰	19	Purple/White 紫/白
5	Yellow	黃	18	Blue/White 藍/白
4	Green	綠	17	Green/White 綠/白
3	White	白	16	Orange/White 橘/白
2	Blue	藍	15	Red/White 紅/白
1	Brown	棕	14	Brown/White 棕/白
Conn.	Wire Color		Conn.	Wire Color

① HDB-26AMMM-SL7000
Color: Black

HDB-26AMMM-SL7AXX
 XX: 01~99Meter
 01: 01 Meter
 02: 02 Meter
 ...
 99: 99Meters
 Cable Length(L): 01~99Meters



- Note:
- * Ⓞ Important Dimension.
 - * Waterproof Rate: IP67
 - * Housing: ABS, Black
 - * Male Pin: Copper Alloy, Gold Plated.
 - * Gasket: EPDM, Black
 - * Screw: Steel, Nickel Plated.
 - * Cable: UL2464 26AWG*26C+Drain+Al/My, PVC Jacket (UV Resistant), OD=8.0mm, Black.
 - * Cable Length Tolerance:
 - 01M: ±40mm
 - 02M~05M: ±60mm
 - 06M~10M: ±100mm
 - 11M~30M: ±200mm
 - 31M~99M: ±500mm

UNIT:mm			TITLE High Density D-SUB Cable Screw 26P M Conn M Pin
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE 1:2	SIZE A4	SHEET 1 OF 1
REV. D	WC-REV. .0	Ⓞ: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Nan_Su	DATE 2019-09-24
DWG NO HDB-26AMMM-SL7AXX	CHECKED BY Feng_Li	DATE 2019-09-24
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2019-09-24