


REV.	ECN NO.	DATE	SIGN.	DESCRIPTION
C	LEN-960019~22	2009/03/12	Li Xiu Zhi	Change SR
D	LEN-9B0075~78	2009/10/21	Li Xiu Zhi	Change SR
E	LEN1540187~190	2015/03/18	Ruru	Change Logo

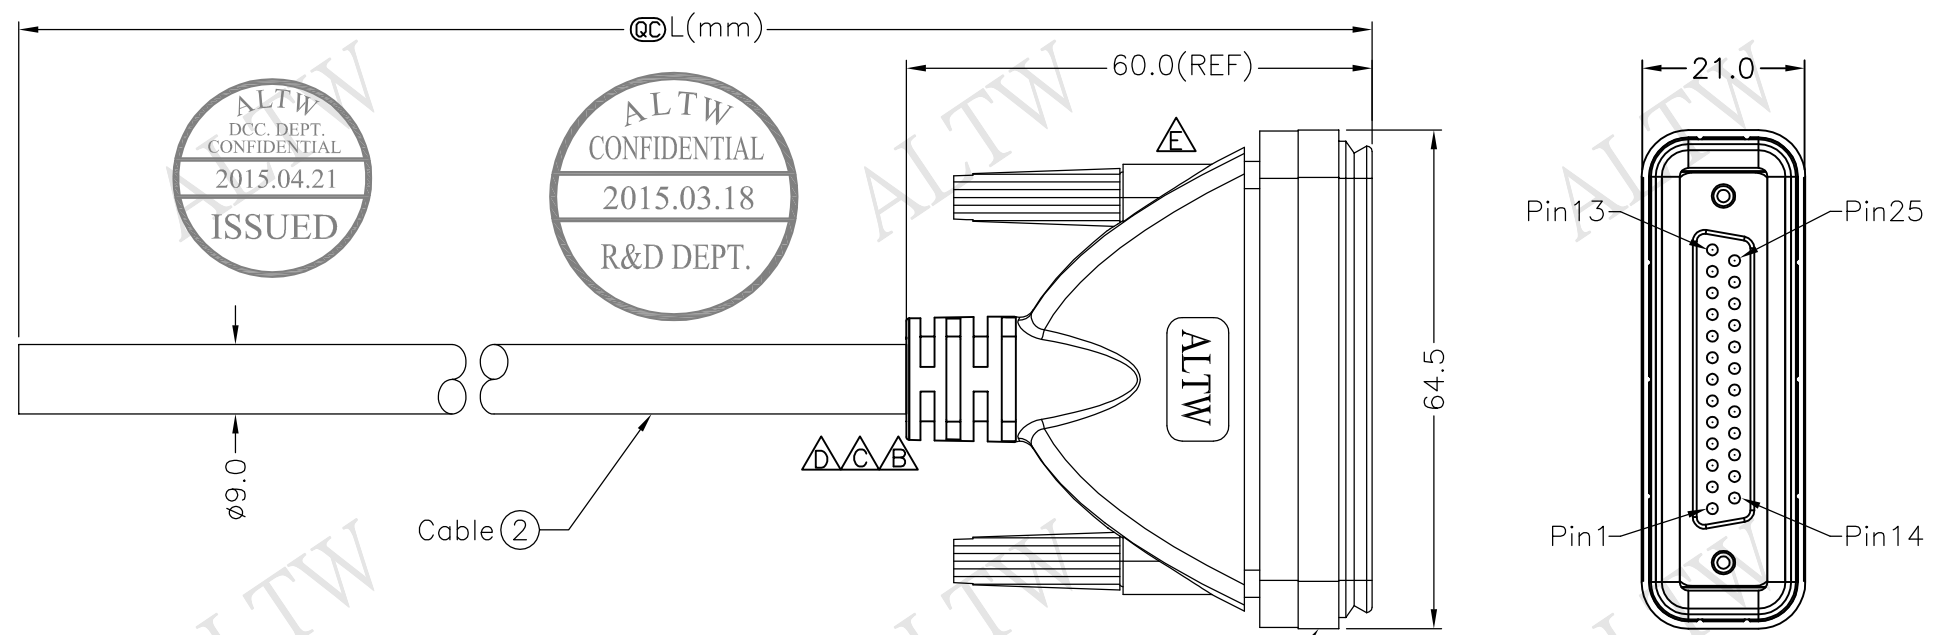

Shell	Drain	地線	25	Pink/Black	粉/黑
12	Light Green	淺綠	24	Grey/Black	灰/黑
11	Pink	粉	23	Green/Black	綠/黑
10	White	白	22	Yellow/Black	黃/黑
9	Grey	灰	21	Orange/Black	橙/黑
8	Purple	紫	20	Red/Black	紅/黑
7	Blue	藍	19	Purple/White	紫/白
6	Green	綠	18	Blue/White	藍/白
5	Yellow	黃	17	Green/White	綠/白
4	Orange	橙	16	Orange/White	橙/白
3	Red	紅	15	Red/White	紅/白
2	Brown	棕	14	Brown/White	棕/白
1	Black	黑	13	Black/White	黑/白
Conn.	Wire Color	Conn.	Wire Color		
Pin Out					

SDB-25AMMM-SL7000 ①
 COLOR: BLACK

SDB-25AMMM-SL7AXX
 ↑
 XX:01~99Meters
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Connector: D-SUB 25 Pin Male
 - * Cable: UL2464 24AWG*25C+Drain+Al/My (UV Resistant)OD=9.0mm, Black
 - * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

UNIT:mm		TITLE
TOLERANCE		D-SUB Conn. Molded Screw DB25Pin M Conn. M Pin
±0.5 mm		SCALE Free SHEET 1 OF 1
REV. E	SIZE A4	@C :Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2015/03/18
DWG NO	CHECKED BY	DATE
SDB-25AMMM-SL7AXX	Rita	2015/03/18
CUSTOMER	APPROVED BY	DATE
ALTW	Lion	2015/03/18

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

A B C D E F

1 2 3 4 5 6 7 8