REV.	ECN. NO.	DATE	SIGN.	DESCRIPTION
B	LEN-8C0201~4	2008/10/30	Li Xiu Zhi	Change SR
C	LEN1730090~93	2017/03/09	Ruru	Change Logo

ALTW CONFIDENTIAL 2017.03.09 R&D DEPT.



Conn.

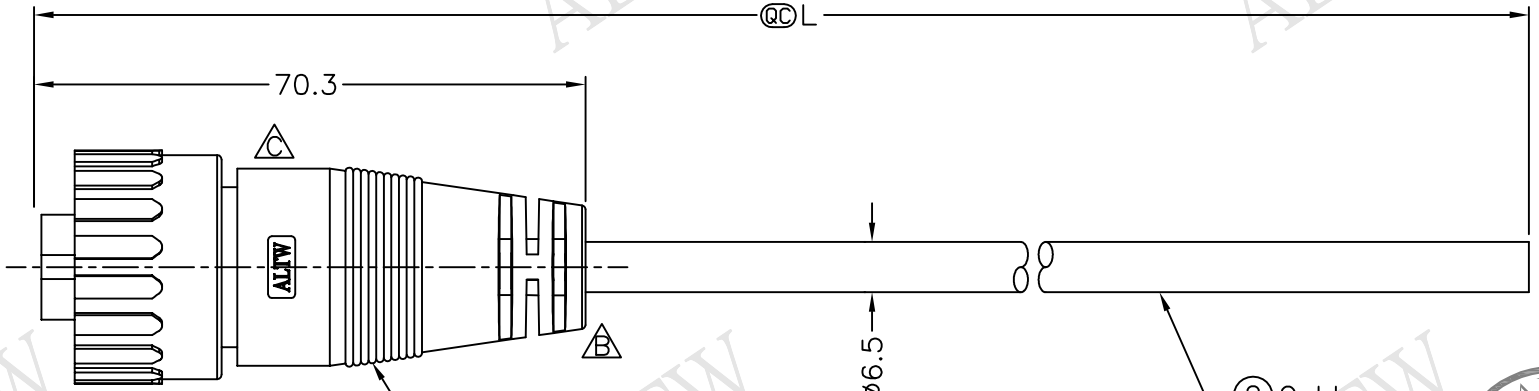

ALTW DCC. DEPT. CONFIDENTIAL 2017.03.14 ISSUED

△C Note:
* QC Important Dimension.
* Waterproof Rate: IP67
* Housing: Nylon+GF, Black
* Female pin: Brass, Gold Plated
* O-Ring: EPDM, Black
* Screw Nut: Nylon+GF, Black
* Cable: UL2464 20AWG*7C+D+AL/My
  UV Resistant, OD=6.5mm, Black
* Cable Length Tolerance:01M:40mm
  02M~05M:60mm
  06M~10M:100mm
  11M~30M:200mm
  31M~99M:500mm



Pin Assignments
Front View前視圖

Conn.	Wire Color	
7	Blue	藍
6	Green	綠
5	Yellow	黃
4	Orange	橙
3	Red	紅
2	Brown	棕
1	Black	黑

Pin Out

PWF-07AFFM-SL7AXX

XX:01~99Meter
01:01Meter
02:02Meters
:
:
99 :99Meters
Cable Length(L):01~99Meters

UNIT:mm	TITLE: 6+PE F Conn F Pin(8A) Screw Type For Cable	ITEM NO	DRAWN BY: Ruru / DATE: 2017/03/09
TOLERANCE: ±0.5 mm	SCALE: Free / SHEET: 1 OF 1	DWG NO: PWE-07AFFM-SL7AXX	CHECKED BY: Rita / DATE: 2017/03/09
	REV: C / SIZE: A4 / QC :Inspection Item	CUSTOMER: ALTW	APPROVED BY: Max / DATE: 2017/03/09

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.