





REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1190025~28	2011/08/18	Jiang Jun Hua	Change SR View
C	LEN1610124~27	2015/12/30	Ruru	Change Logo

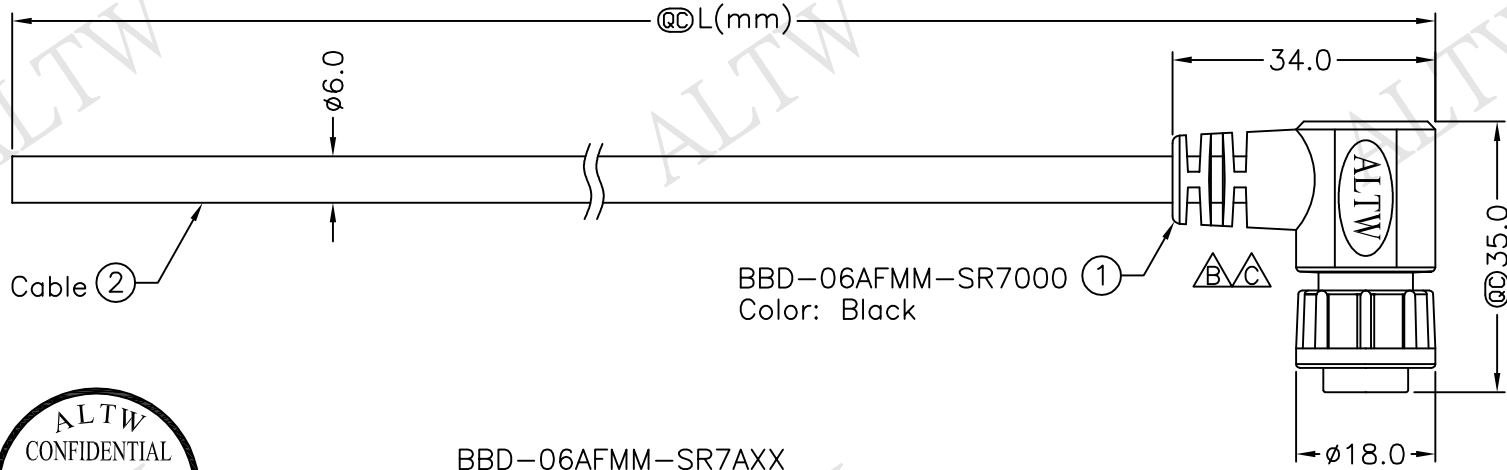

BBD-06AFMM-SR7AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

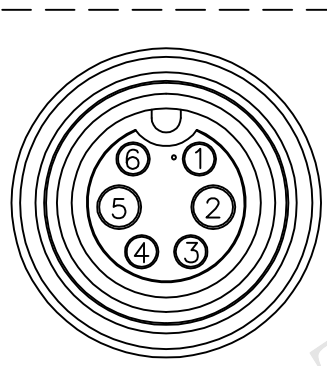

Pin Assignments
Front View

6	Gray (24AWG) 灰	△
5	Blue (20AWG) 藍	
4	Yellow (24AWG) 黃	
3	Green (24AWG) 綠	
2	Brown (20AWG) 棕	
1	White (24AWG) 白	
Conn.	Wire Color	
	Pin Out	

Note:
 * @@Important Dimension To Check.
 * Waterproof Rate: IP67
 * Housing: Black, Nylon+GF
 * Pin: Copper Alloy, Gold Plated
 * Cable: UL2464(20AWG*2C+24AWG*4C)+Drain+Al/My, Black, PVC Jacket UV Resistant, OD=6.0
 △* Cable Length Tolerance:01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

UNIT:mm		TITLE	Standard	ITEM NO	DRAWN BY	DATE
TOLERANCE	±0.5 mm	Cable Screw 6Pin F Conn M Pin		BBD-06AFMM-SR7AXX	Ruru	2015/12/30
		SCALE	Free	CUSTOMER	CHECKED BY	DATE
		REV.	C	ALTW	Rita	2015/12/30
		SIZE	A4		APPROVED BY	DATE
		SHEET	1 OF 1		Lisa	2015/12/30
		QC	:Inspection Item			

Amphenol LTW
 安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.